

### Description

The 5PB11xx is a high-performance LVCMOS clock buffer family. It has best-in-class additive phase jitter of 50fsec RMS.


There are five different fan-out variations available: 1:2 to 1:10.

The 5PB11xx also supports a synchronous glitch-free output enable (OE) function to eliminate any potential intermediate incorrect output clock cycles when enabling or disabling outputs. It's available in various packages and can operate from a 1.8V to 3.3V supply.

### Features

- High-performance 1:2, 1:4, 1:6, 1:8, 1:10 LVCMOS clock buffer
- Very low pin-to-pin skew < 50ps
- Very low additive jitter < 50fs
- Supply voltage: 1.8V to 3.3V
- 3.3V tolerant input clock
- $f_{MAX} = 200\text{MHz}$
- Integrated serial termination for  $50\Omega$  channel
- Packaged in 8-, 14-, 16-, 20-pin TSSOP and as small as  $2 \times 2$  mm DFN and QFN packages
- Industrial ( $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ) and extended ( $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ) temperature ranges

### Block Diagram

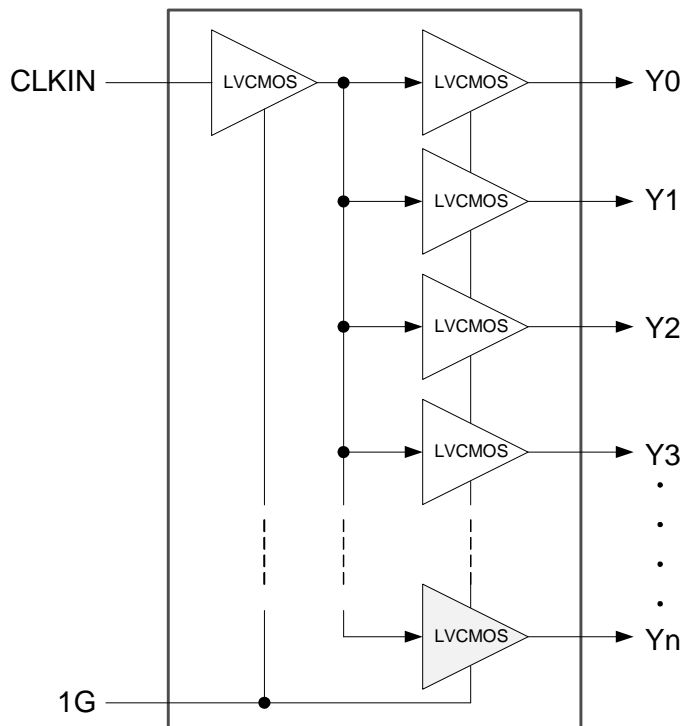

## Pin Assignments for TSSOP Packages

CLKIN	1	8	Y1
1G	2	7	NC
Y0	3	6	VDD
GND	4	5	NC

5PB1102PGG

CLKIN	1	8	Y1
1G	2	7	Y3
Y0	3	6	VDD
GND	4	5	Y2

5PB1104PGG

CLKIN	1	14	Y1
1G	2	13	Y3
Y0	3	12	VDD
GND	4	11	Y2
VDD	5	10	GND
Y4	6	9	Y5
GND	7	8	VDD

5PB1106PGG

CLKIN	1	16	Y1
1G	2	15	Y3
Y0	3	14	VDD
GND	4	13	Y2
VDD	5	12	GND
Y4	6	11	Y5
GND	7	10	VDD
Y6	8	9	Y7

5PB1108PGG






CLKIN	1	20	Y1
1G	2	19	Y3
Y0	3	18	VDD
GND	4	17	Y2
VDD	5	16	GND
Y4	6	15	Y5
GND	7	14	VDD
Y6	8	13	Y7
VDD	9	12	Y8
Y9	10	11	GND

5PB1110PGG

## Pin Descriptions for TSSOP Packages

Device Number	LVC MOS Clock Input	Clock Output Enable	LVC MOS Clock Output	Supply Voltage	Ground
	CLKIN	1G	Y0, Y1, . . . Y9	VDD	GND
5PB1102PGG	1	2	3, 8	6	4
5PB1104PGG	1	2	3, 8, 5, 7	6	4
5PB1106PGG	1	2	3, 14, 11, 13, 6, 9	5, 8, 12	4, 7, 10
5PB1108PGG	1	2	3, 16, 13, 15, 6, 11, 8, 9	5, 10, 14	4, 7, 12
5PB1110PGG	1	2	3, 20, 17, 19, 6, 15, 8, 13, 12, 10	5, 9, 14, 18	4, 7, 11, 16

## Pin Assignments for DFN/QFN Packages

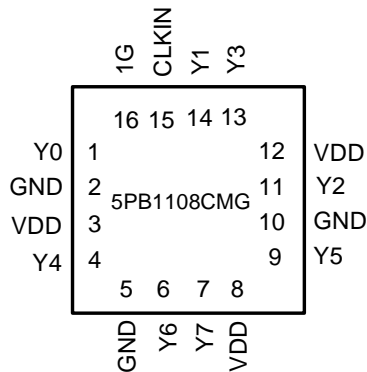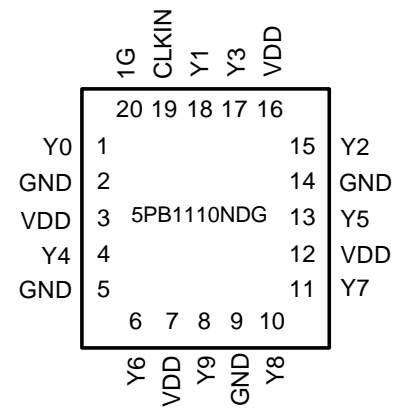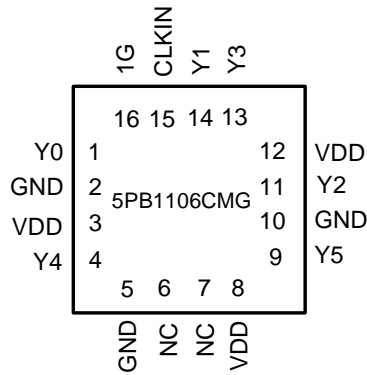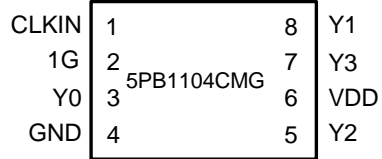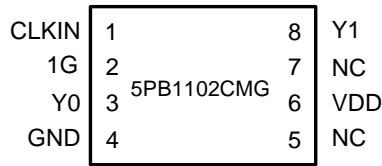

## Pin Descriptions for DFN/QFN Packages

Device Number	LVC MOS Clock Input	Clock Output Enable	LVC MOS Clock Output	Supply Voltage	Ground
	CLKIN	1G	Y0, Y1, . . . Y9	VDD	GND
5PB1102CMG	1	2	3, 8	6	4
5PB1104CMG	1	2	3, 5, 7, 8	6	4
5PB1106CMG	15	16	1, 4, 9, 11, 13, 14	3, 8, 12	2, 5, 10
5PB1108CMG	15	16	1, 4, 6, 7, 9, 11, 13, 14	3, 8, 12	2, 5, 10
5PB1110NDG	19	20	1, 4, 6, 8, 10, 11, 13, 15, 17, 18	3, 7, 12, 16	2, 5, 9, 14

## Output Logic Table

Inputs		Output
CLKIN	1G	Yn
X	L	L
L	H	L
H	H	H

After at least three cycles of input clock toggling, Output Enable function is asynchronous to eliminate any intermediate incorrect output clock cycles during transition which may cause frequency peaking to the downstream device.

## Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the 5PB11xx. These ratings, which are standard values for IDT commercially rated parts, are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

Item	Rating
Supply Voltage, $V_{DD}$	3.8V
Output Enable and All Outputs	-0.4 V to $V_{DD} + 0.5$ V
CLKIN	-0.4 V to 3.465V
Ambient Operating Temperature (industrial)	-40 to +85°C
Ambient Operating Temperature (extended)	-40 to +105°C
Storage Temperature	-65 to +150°C
Junction Temperature	125°C
Soldering Temperature	260°C

## Recommended Operation Conditions

Parameter	Min.	Typ.	Max.	Units
Ambient Operating Temperature (industrial)	-40		+85	°C
Ambient Operating Temperature (extended)	-40		+105	°C
Power Supply Voltage (measured in respect to GND)	+1.71		+3.465	V

## DC Electrical Characteristics

( $V_{DD} = 1.8V, 2.5V, 3.3V$ )

$V_{DD} = 1.8V \pm 5\%$ , Ambient temperature -40° to +105°C, unless stated otherwise.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	$V_{DD}$		1.71		1.89	V
Input High Voltage, CLKIN	$V_{IH}$	Note 1.	$0.7 \times V_{DD}$		3.465	V
Input Low Voltage, CLKIN	$V_{IL}$	Note 1.			$0.3 \times V_{DD}$	V
Input High Voltage, 1G	$V_{IH}$		1.6		$V_{DD}$	V
Input Low Voltage, 1G	$V_{IL}$				0.6	V
Output High Voltage	$V_{OH}$	$I_{OH} = -5mA$ .	1.4			V
Output Low Voltage	$V_{OL}$	$I_{OL} = 5mA$ .			0.4	V
Nominal Output Impedance	$Z_O$			50		$\Omega$
Input Capacitance	$C_{IN}$	CLKIN, 1G pin.		5		pF
<b>Operating Supply Current</b>						
5PB1102	$I_{DD}$	100MHz, no load, 25°C.		6	8	mA
5PB1104		100MHz, no load, 25°C.		12	13	
5PB1106		100MHz, no load, 25°C.		15	18	
5PB1108		100MHz, no load, 25°C.		20	23	
5PB1110		100MHz, no load, 25°C.		23	27	

Notes: 1. Nominal switching threshold is  $V_{DD}/2$ .

$V_{DD} = 2.5V \pm 5\%$ , Ambient temperature  $-40^{\circ}$  to  $+105^{\circ}C$ , unless stated otherwise.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	$V_{DD}$		2.375		2.625	V
Input High Voltage, CLKIN	$V_{IH}$	Note 1.	$0.7 \times V_{DD}$		3.465	V
Input Low Voltage, CLKIN	$V_{IL}$	Note 1.			$0.3 \times V_{DD}$	V
Input High Voltage, 1G	$V_{IH}$		1.8		$V_{DD}$	V
Input Low Voltage, 1G	$V_{IL}$				0.7	V
Output High Voltage	$V_{OH}$	$I_{OH} = -8mA$ .	1.9			V
Output Low Voltage	$V_{OL}$	$I_{OL} = 8mA$ .			0.5	V
Nominal Output Impedance	$Z_O$			50		$\Omega$
Input Capacitance	$C_{IN}$	CLKIN, 1G pin.		5		pF
<b>Operating Supply Current</b>						
5PB1102	$I_{DD}$	100MHz, no load, 25°C.		9	11	mA
5PB1104		100MHz, no load, 25°C.		15	18	
5PB1106		100MHz, no load, 25°C.		21	24	
5PB1108		100MHz, no load, 25°C.		27	31	
5PB1110		100MHz, no load, 25°C.		32	37	

$V_{DD} = 3.3V \pm 5\%$ , Ambient temperature  $-40^{\circ}$  to  $+105^{\circ}C$ , unless stated otherwise.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	$V_{DD}$		3.135		3.465	V
Input High Voltage, CLKIN	$V_{IH}$	Note 1.	$0.7 \times V_{DD}$		3.465	V
Input Low Voltage, CLKIN	$V_{IL}$	Note 1.			$0.3 \times V_{DD}$	V
Input High Voltage, 1G	$V_{IH}$		2		$V_{DD}$	V
Input Low Voltage, 1G	$V_{IL}$				0.8	V
Output High Voltage	$V_{OH}$	$I_{OH} = -12mA$ .	2.4			V
Output Low Voltage	$V_{OL}$	$I_{OL} = 12mA$ .			0.7	V
Nominal Output Impedance	$Z_O$			50		$\Omega$
Input Capacitance	$C_{IN}$	CLKIN, 1G pin.		5		pF
<b>Operating Supply Current</b>						
5PB1102	$I_{DD}$	100MHz, no load, 25°C.		12	13	mA
5PB1104		100MHz, no load, 25°C.		20	22	
5PB1106		100MHz, no load, 25°C.		25	30	
5PB1108		100MHz, no load, 25°C.		35	38	
5PB1110		100MHz, no load, 25°C.		40	45	

## AC Electrical Characteristics

( $V_{DD} = 1.8V, 2.5V, 3.3V$ )

$V_{DD} = 1.8V \pm 5\%$ , Ambient Temperature  $-40^\circ$  to  $+105^\circ C$ , unless stated otherwise.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			0		200	MHz
Output Rise Time (2pF load)	$t_{OR}$	0.36V to 1.44V, $C_L = 2pF$ .		0.5	0.75	ns
Output Fall Time (2pF load)	$t_{OF}$	1.44V to 0.36V, $C_L = 2pF$ .		0.5	0.75	ns
Output Rise Time (5pF load)	$t_{OR}$	0.36V to 1.44V, $C_L = 5pF$ .		0.8	1.0	ns
Output Fall Time (5pF load)	$t_{OF}$	1.44V to 0.36V, $C_L = 5pF$ .		0.8	1.0	ns
Start-up Time	$t_{START-UP}$	Part start-up time for valid outputs after $V_{DD}$ ramp-up.			3	ms
Propagation Delay		Note 1.	1.5	1.9	2.5	ns
Buffer Additive Phase Jitter, RMS		156.25MHz, Integration Range: 12kHz–20MHz.			0.05	ps
Output to Output Skew (5PB1102/04)		Rising edges at $V_{DD}/2$ , Note 2.		35	50	ps
Output to Output Skew (5PB1106)		Rising edges at $V_{DD}/2$ , Note 2.		35	58	ps
Output to Output Skew (5PB1108/10)		Rising edges at $V_{DD}/2$ , Note 2.		45	65	ps
Device to Device Skew		Rising edges at $V_{DD}/2$ .			200	ps
Output Enable Time	$t_{EN}$	$C_L \leq 5pF$ .			3	cycles
Output Disable Time	$t_{DIS}$	$C_L \leq 5pF$ .			3	cycles
Duty Cycle	$t_{DC}$	See note 3.		50		%

$V_{DD} = 2.5V \pm 5\%$ , Ambient Temperature  $-40^\circ$  to  $+105^\circ C$ , unless stated otherwise.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			0		200	MHz
Output Rise Time (2pF load)	$t_{OR}$	0.5V to 2.0V, $C_L = 2pF$ .		0.4	0.7	ns
Output Fall Time (2pF load)	$t_{OF}$	2.0V to 0.5V, $C_L = 2pF$ .		0.4	0.7	ns
Output Rise Time (5pF load)	$t_{OR}$	0.5V to 2.0V, $C_L = 5pF$ .		0.75	1.0	ns
Output Fall Time (5pF load)	$t_{OF}$	2.0V to 0.5V, $C_L = 5pF$ .		0.75	1.0	ns
Start-up Time	$t_{START-UP}$	Part start-up time for valid outputs after $V_{DD}$ ramp-up.			3	ms
Propagation Delay (5PB1102/04)		Note 1.	1.9	2.4	2.9	ns
Propagation Delay (5PB1106/08)			2.0	2.4	3.3	ns
Propagation Delay (5PB1110)			2.0	2.4	3.0	ns
Buffer Additive Phase Jitter, RMS		156.25MHz, Integration Range: 12kHz–20MHz.			0.05	ps
Output to Output Skew (5PB1102/04)		Rising edges at $V_{DD}/2$ , Note 2.		35	50	ps
Output to Output Skew (5PB1106)		Rising edges at $V_{DD}/2$ , Note 2.		35	58	ps
Output to Output Skew (5PB1108/10)		Rising edges at $V_{DD}/2$ , Note 2.		45	65	ps
Device to Device Skew		Rising edges at $V_{DD}/2$ .			200	ps
Output Enable Time	$t_{EN}$	$C_L \leq 5pF$ .			3	cycles
Output Disable Time	$t_{DIS}$	$C_L \leq 5pF$ .			3	cycles
Duty Cycle	$t_{DC}$	See note 3.		50		%

$V_{DD} = 3.3V \pm 5\%$ , Ambient Temperature  $-40^\circ$  to  $+105^\circ C$ , unless stated otherwise.


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			0		200	MHz
Output Rise Time (2pF load)	$t_{OR}$	0.66V to 2.64V, $C_L = 2pF$ .		0.45	0.6	ns
Output Fall Time (2pF load)	$t_{OF}$	2.64V to 0.66V, $C_L = 2pF$ .		0.45	0.6	ns

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Rise Time (5pF load)	$t_{OR}$	0.66V to 2.64V, $C_L = 5pF$ .		0.7	1.0	ns
Output Fall Time (5pF load)	$t_{OF}$	2.64V to 0.66V, $C_L = 5pF$ .		0.7	1.0	ns
Start-up Time	$t_{START-UP}$	Part start-up time for valid outputs after $V_{DD}$ ramp-up.			3	ms
Propagation Delay (5PB1102/04)		Note 1.	1.7	2	2.4	ns
Propagation Delay (5PB1106/08)			1.7	2	2.7	ns
Propagation Delay (5PB1110)			1.7	2	2.5	ns
Buffer Additive Phase Jitter, RMS		156.25MHz, Integration Range: 12kHz–20MHz.			0.05	ps
Output to Output Skew (5PB1102/04)		Rising edges at $V_{DD}/2$ , Note 2.		35	50	ps
Output to Output Skew (5PB1106)		Rising edges at $V_{DD}/2$ , Note 2.		35	58	ps
Output to Output Skew (5PB1108/10)		Rising edges at $V_{DD}/2$ , Note 2.		45	65	ps
Device to Device Skew		Rising edges at $V_{DD}/2$ .			200	ps
Output Enable Time	$t_{EN}$	$C_L \leq 5pF$ .			3	cycles
Output Disable Time	$t_{DIS}$	$C_L \leq 5pF$ .			3	cycles
Duty Cycle	$t_{DC}$	See note 3.		50		%


**Notes:**

1. With rail to rail input clock.
2. Between any 2 outputs with equal loading.
3. Duty cycle on outputs will match incoming clock duty cycle when  $V_{IH}$  on CLKIN pin equals  $V_{DD}$  power supply voltage. Consult IDT for tight duty cycle clock generators.

## Phase Noise Plots

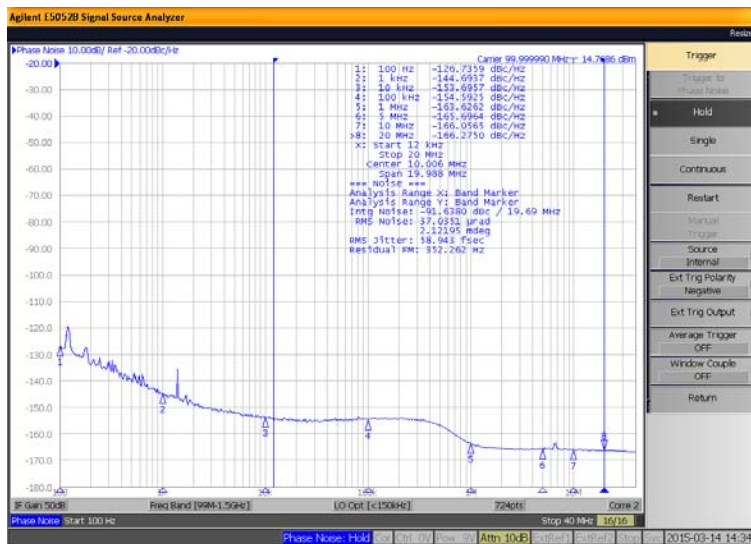


**Figure 1. 5PB11xx Reference Phase Noise 58.9fs (12kHz to 20MHz)**

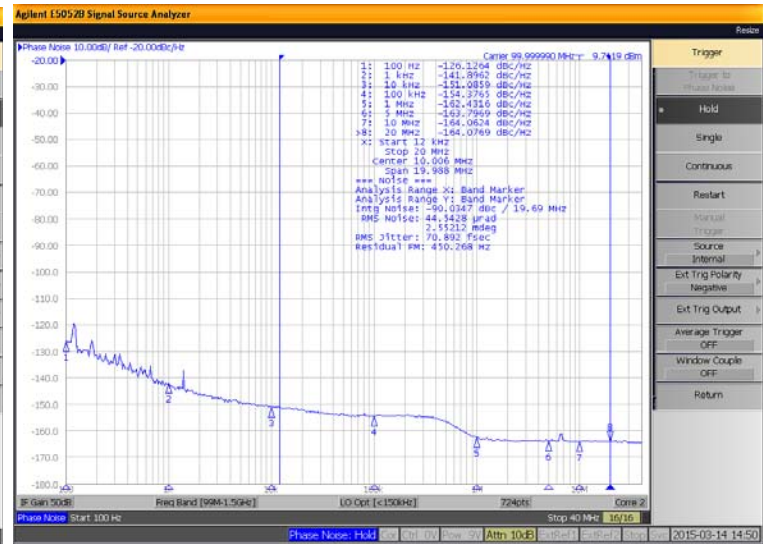


**Figure 2. 5PB11xx Output Phase Noise 70.9fs (12kHz to 20MHz)**

The phase noise plots above show the low additive jitter of the 5PB11xx high-performance buffer. With an integration range of 12kHz to 20MHz, the reference input has about 58.9fs of RMS phase jitter while the output of 5PB11xx has about 70.9fs of RMS phase jitter. This results in a low additive phase jitter of only 39fs.


## Test Load and Circuit

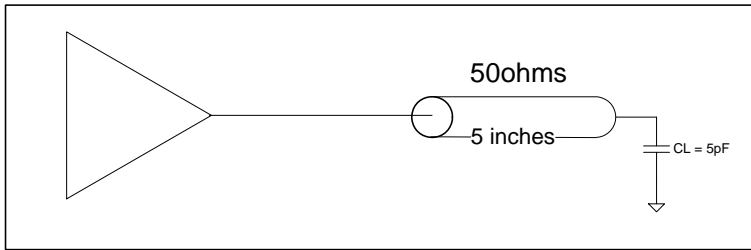


## Marking Diagrams (industrial temperature range)




8-pin TSSOP

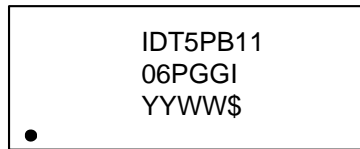


14-pin TSSOP

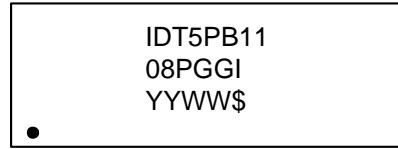


16-pin TSSOP

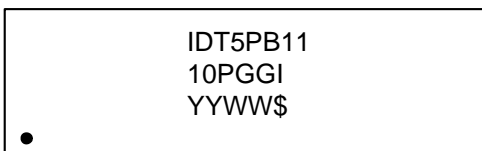


20-pin TSSOP




8-pin DFN



16-pin QFN



16-pin QFN

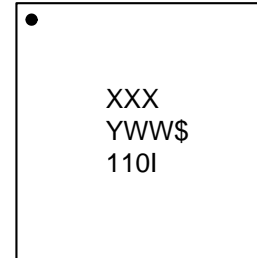


20-pin QFN

### Notes:


1. "AA" denotes the last two digits of the part number for 8-TSSOP and DFN (e.g. 02, 04).
2. "\*\*" is the lot sequence.
3. "XXX" denotes the last three characters of the Asm lot (20-QFN only).
4. "YYWW", "YWW", "YW", or "Y" is the last digit(s) of the year and week that the part was assembled.
5. "\$" denotes the mark code.
6. "G" after the two-letter package code denotes RoHS compliant package.
7. "I" denotes industrial temperature range device.
8. Bottom marking: LOT and COO (TSSOP only).




## Marking Diagrams (extended temperature range)




8-pin TSSOP

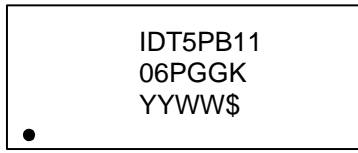


14-pin TSSOP

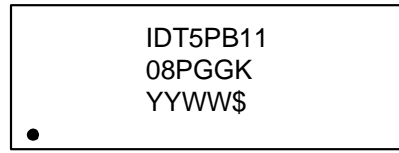


16-pin TSSOP

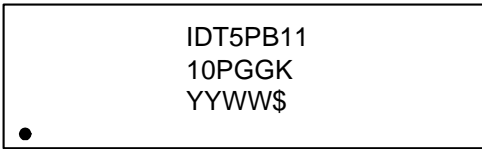


20-pin TSSOP




8-pin DFN



16-pin QFN



16-pin QFN

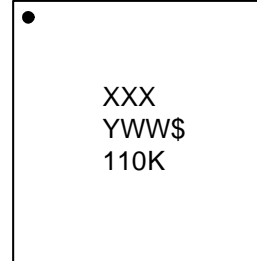

20-pin QFN

### Notes:


1. "AA" denotes the last two digits of the part number for 8-TSSOP and DFN (e.g. 02, 04).
2. "\*\*" is the lot sequence.
3. "XXX" denotes the last three characters of the Asm lot (20-QFN only).
4. "YYWW", "YWW", "YW", or "Y" is the last digit(s) of the year and week that the part was assembled.
5. "\$" denotes the mark code.
6. "G" after the two-letter package code denotes RoHS compliant package.
7. "K" denotes extended temperature range device.
8. Bottom marking: LOT and COO (TSSOP only).

## Thermal Characteristics


Package	Applies to	$\theta_{JA}$	$\theta_{JC}$	$\theta_{JB}$	Units
8-TSSOP	5PB1102, 5PB1104	122.0	58.2	139.3	°C/W; still air
14-TSSOP	5PB1106	84.5	44.2	64.5	°C/W; still air
16-TSSOP	5PB1108	80.9	43.3	60.1	°C/W; still air
20-TSSOP	5PB1110	72.5	37.9	49.8	°C/W; still air
8-DFN	5PB1102, 5PB1104	120.2	99.4	63.3	°C/W; still air
16-QFN	5PB1106, 5PB1108	115.6	83.1	61.8	°C/W; still air
20-QFN	5PB1110	49.6	94.7	5.1	°C/W; still air

# Package Outline Drawings (8-DFN, 2 x 2 mm Body, 0.5mm pitch)


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	09/18/14	J.HUA

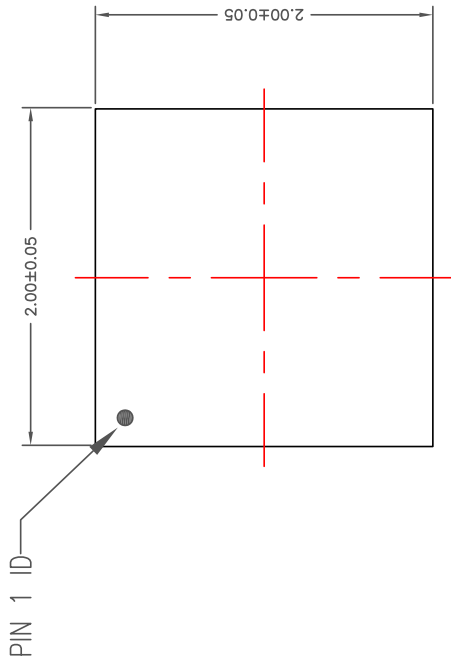

TOP VIEW

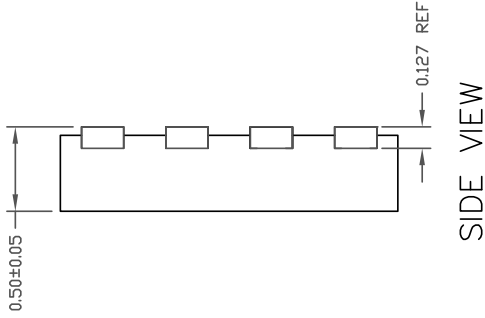

SIDE VIEW

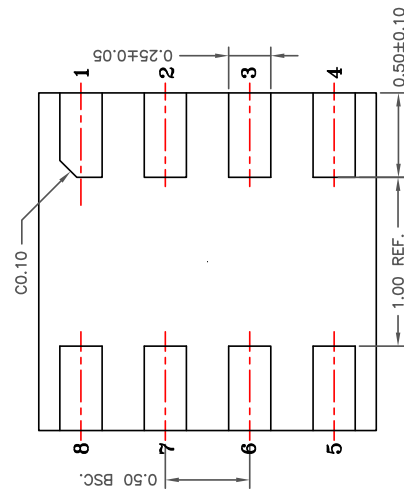

BOTTOM VIEW


NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. ALL DIMENSIONS ARE IN MILLIMETERS

TOLERANCES UNLESS SPECIFIED DECIMAL ± XXX ± XXXX ±	APPROVALS DRAWN: <i>[Signature]</i> CHECKED: <i>[Signature]</i>	DATE 08/10/14 09/10/14	TITLE CMGB PACKAGE OUTLINE 2.0 X 2.0 mm BODY 0.5mm PITCH VQFN
TOLERANCES UNLESS SPECIFIED ANGULAR ± XXX ± XXXX ±	APPROVALS DRAWN: <i>[Signature]</i> CHECKED: <i>[Signature]</i>	DATE 08/10/14 09/10/14	TITLE CMGB PACKAGE OUTLINE 2.0 X 2.0 mm BODY 0.5mm PITCH VQFN
IDT www.idt.com 6024 SILVER CREEK VALLEY ROAD San Jose, CA 95138 PHONE: (408) 284-8200 FAX: (408) 492-8674	SIZE C	DRAWING No. PSC-4490	REV 00
DO NOT SCALE DRAWING			SHEET 1 OF 2

Package Outline Drawings, cont. (8-DFN, 2 x 2 mm Body, 0.5mm pitch)

REVISIONS		
REV	DESCRIPTION	DATE
00	INITIAL RELEASE	09/18/14

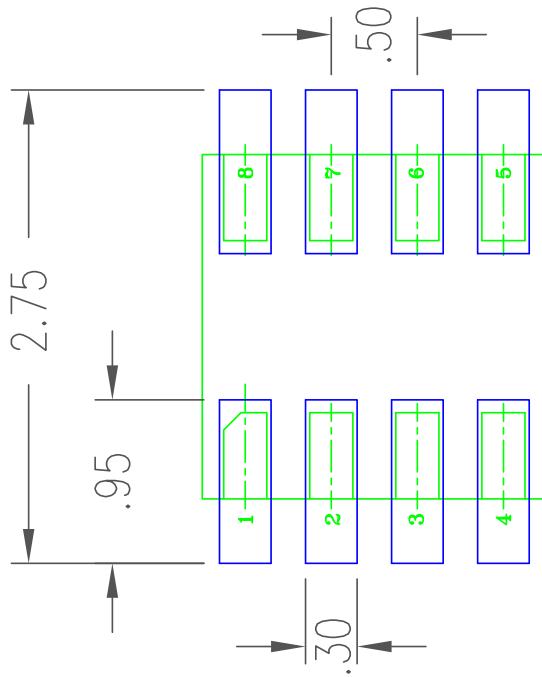


RECOMMENDED LAND PATTERN DIMENSION

- NOTES:
1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
  2. TOP DOWN VIEW. AS VIEWED.
  3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
  4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
  5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR MOUNT DESIGN AND LAND PATTERN.


TOLERANCES UNLESS SPECIFIED	DECIMAL	ANGULAR	±
XXXX±			
APPROVALS	DATE	TITLE	CMG8 PACKAGE OUTLINE
DRAWN	04/09/10/14	SIZE	2.0 X 2.0 mm BODY
CHECKED			0.5 mm PITCH VFOFN
		DRAWING No.	PSC-4490
		REV	00
		DO NOT SCALE DRAWING	SHEET 2 OF 2

# Package Outline Drawings (16-VFQFN, 2.5 x 2.5 mm Body, 0.4mm pitch)


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	04/03/14	JH
01	ADD PINTI CHAMFER	12/11/14	JH

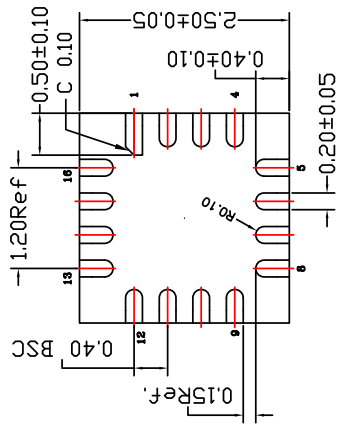

TOP VIEW

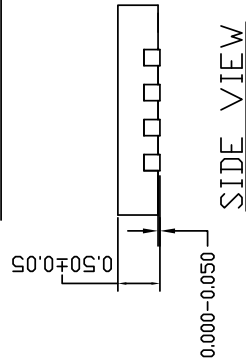

BOTTOM VIEW



SIDE VIEW


TOLERANCES UNLESS SPECIFIED DECIMAL ±1° XX± XXX±	APPROVALS	DATE	6024 Silver Creek Valley Road San Jose CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-8591 WWW.IDT.COM	
	DRAWN	04/03/14	<b>IDT™</b> CMG 16 PACKAGE OUTLINE 2.5 x 2.5 mm BODY 0.40 mm PITCH VFQFN	
	CHECKED		SIZE	DRAWING No. PSC-4478
			REV	01
DO NOT SCALE DRAWING			SHEET 1 OF 2	

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. ALL DIMENSIONS ARE IN MILLIMETERS.

Package Outline Drawings, cont. (16-VFQFN, 2.5 x 2.5 mm Body, 0.4mm pitch)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	04/03/14	JH
01	ADD PIN1 CHAMFER	12/11/14	JH

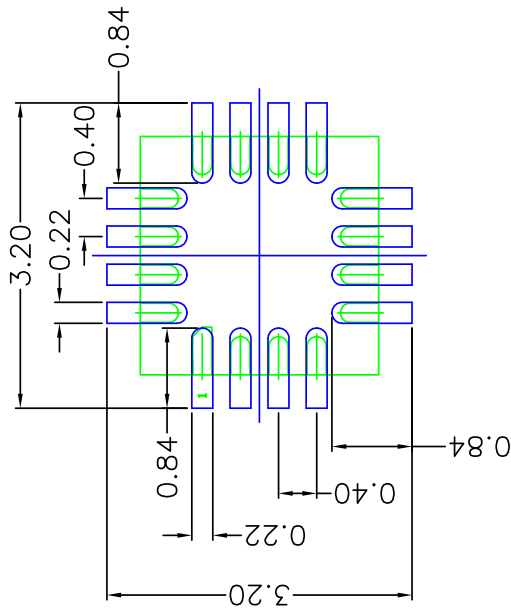

RECOMMENDED LAND PATTERN DIMENSION


NOTES:

1. ALL DIMENSIONS ARE IN MM. ANGLES IN DEGREES.
2. TOP DOWN VIEW AS VIEWED ON PCB.
3. COMPONENT OUTLINE IS SHOWN FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED DECIMAL XX± XXX±	ANGULAR ±1°	APPROVALS	DATE	IDT™ 6024 Silver Creek Valley Road San Jose CA 95138 PHONE: (408) 284-8200 WWW.IDT.COM FAX: (408) 284-8591
			04/03/14	
		DRAWN	DATE	TITLE
		CHECKED		CMG 16 PACKAGE OUTLINE
				2.5 x 2.5 mm BODY
				0.40 mm PITCH VFQFN
				SIZE
				DRAWING No. PSC-4478
				REV
				01
				DO NOT SCALE DRAWING
				SHEET 2 OF 2

# Package Outline Drawings (20-QFN, 3 x 3 mm Body, 0.4mm pitch)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	3/30/16	JH

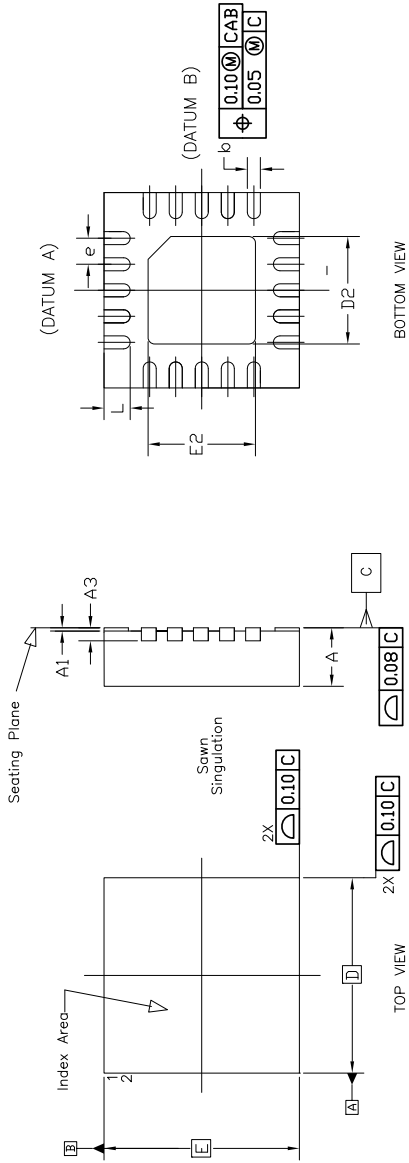

Symbol	DIMENSION		
	Min	Norm	Max
A	0.80	0.90	1.00
A1	0	0.02	0.05
A3	0.20 Ref		
b	0.17	0.20	0.25
e	0.40 BASIC		
N	20		
ND	5		
NE	5		
D	3.00 BASIC		
E	3.00 BASIC		
D2	1.55	1.65	1.75
E2	1.55	1.65	1.75
L	0.30	0.40	0.50


- NOTE :
1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
  2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
  3. COPLANARITY SHALL NOT EXCEED 0.05 mm.
  4. PACKAGE LENGTH / PACKAGE WIDTH ARE CONSIDERED AS SPECIAL CHARACTERISTIC. (S)
  5. REFER JEDEC MO-220.

TOLERANCES UNLESS SPECIFIED	DATE	APPROVALS	TITLE
DECIMAL ±1°	3/30/16		ND/NDG 20 PACKAGE OUTLINE
XX±			3.0 x 3.0 mm BODY, EPAD 1.65 mm SQ
XXX±			0.40 PITCH QFN
DRAWN <i>QAG</i>	CHECKED		
SIZE		DRAWING No.	REV
C		PSC-4179-02	00
DO NOT SCALE DRAWING			SHEET 1 OF 2

6024 Silver Creek Valley Road  
 San Jose CA 95138  
 PHONE: (408) 284-8200  
 WWW.IDT.COM FAX: (408) 284-8591

**Package Outline Drawings, cont. (20-QFN, 3 x 3 mm Body, 0.4mm pitch)**

REVISIONS		
REV	DESCRIPTION	DATE
00	INITIAL RELEASE	3/30/16
		APPROVED
		JH

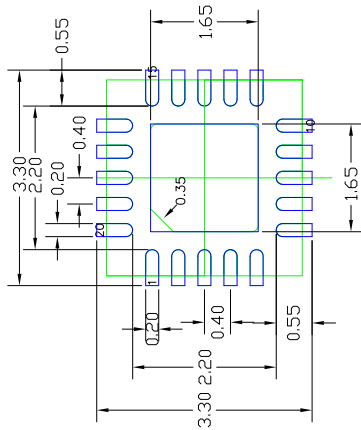

RECOMMENDED LAND PATTERN DIMENSION

**NOTES:**


1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. TOP-DOWN VIEW, AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOWS FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

6024 Silver Creek Valley Road San Jose CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-8591 WWW.IDT.COM		TITLE ND/NDG 20 PACKAGE OUTLINE 3.0 x 3.0 mm BODY, EPAD 1.65 mm SQ 0.40 PITCH QFN	
TOLERANCES UNLESS SPECIFIED	DATE	SIZE	REV
DECIMAL ±1°	3/30/16	C	00
XX±		DRAWING No. PSC-4179-02	
XXX±		DO NOT SCALE DRAWING	
APPROVALS	CHECKED	SHEET 2 OF 2	





# Package Outline Drawings (8-, 14-, 16-, 20-TSSOP)

DATE		REVISIONS	
CREATED	REV	DESCRIPTION	AUTHOR
08/25/98	02	ADD 14 & 16 LD	T. VU
07/10/99	03	ADD 8 LD	T. VU
5/23/01	04	ADDED TOPMARK TO TITLE	
10/14/04	05	ADD "GREEN" PGG NOMENCLATURE	TU VU
3/8/13	06	ADDED PACKAGE CODE	RAC
9/3/14	07	ADD TOLERANCE FOR A, A1, E AND b	CK LEE
3/10/17	08	ADD OPTION T1	R.TANH

NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

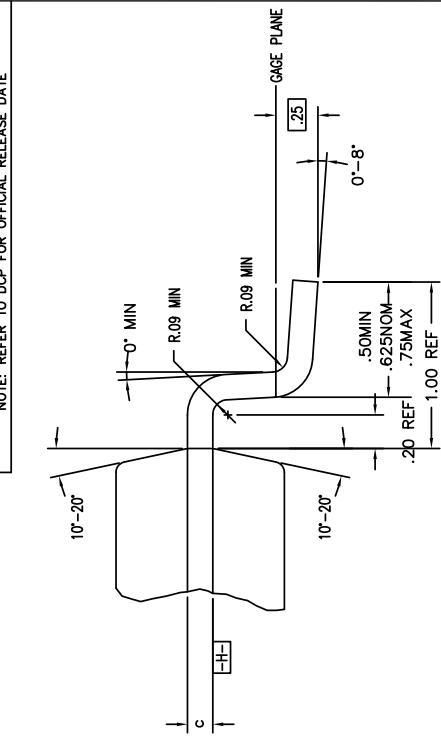

DETAIL B

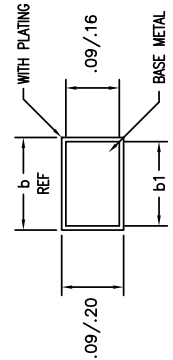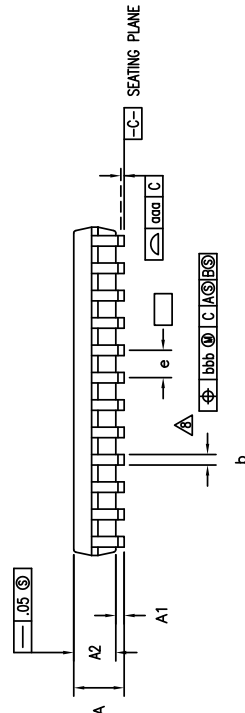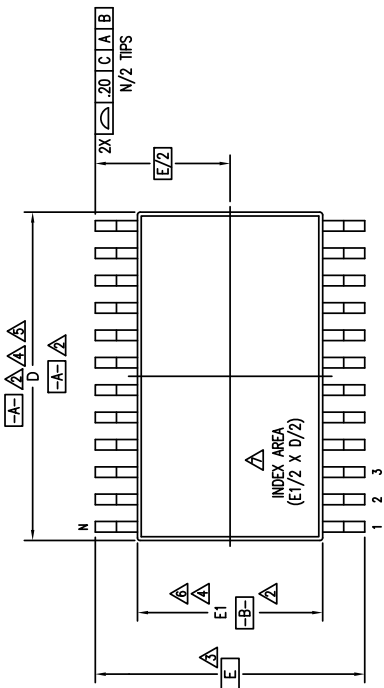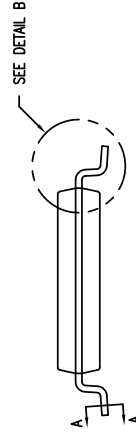

SECTION A-A

TOLERANCES UNLESS SPECIFIED DECIMAL ANGULAR ± XXX.XX XX.XX XX.XX	2975 Stender Way Santa Clara, CA 95054 PHONE: (408) 727-8116 WWW.IDT.COM FAX: (408) 492-8874	SIZE	REV
		C	08
TITLE		DRAWING No.	SHEET
PG/PGG PACKAGE OUTLINE (PG OR PA TOPMARK CODE) 4.4 mm BODY WIDTH TSSOP .65 mm PITCH		PSC-4056	1 OF 3
DO NOT SCALE DRAWING			



# Package Outline Drawings, cont. (8-, 14-, 16-, 20-TSSOP)

DATE CREATED		REV DESCRIPTION		REVISIONS	
08/25/98	02	ADD 14 & 16 LD		REV	DESCRIPTION
07/10/99	03	ADD 8 LD		T. VU	
5/23/01	04	ADDED TOPMARK TO TITLE		T. VU	
10/14/04	05	ADD "GREEN" PGC NOMENCLATURE		TU VU	
3/8/13	06	ADDED PACKAGE CODE		RAC	
9/3/14	07	ADD TOLERANCE FOR A, A1, E AND b		CK LEE	
3/10/17	08	ADD OPTION T1		R.TANH	

NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

SYMBOL	PG/PGC8						PG/PGC14						PG/PGC16						PG/PGC20						PG/PGC24						PG/PGC28					
	JEDEC VARIATION			N D T E			JEDEC VARIATION			N D T E			JEDEC VARIATION			N D T E			JEDEC VARIATION			N D T E			JEDEC VARIATION			N D T E			JEDEC VARIATION			N D T E		
	AA	MIN	NOM	MAX	MIN	NOM	MAX	AA-1	MIN	NOM	MAX	AB	MIN	NOM	MAX	AC	MIN	NOM	MAX	AD	MIN	NOM	MAX	AE	MIN	NOM	MAX	MIN	NOM	MAX						
A	.85	1.10	1.20	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20	.85	1.10	1.20					
A1	.05	.10	.15	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15	.05	.10	.15					
A2	.80	1.00	1.05	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05					
D	2.90	3.00	3.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90	5.00	5.10					
E	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20	6.40	6.60					
E1	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30	4.40	4.50					
e	.65 BSC																																			
b	.19	.25	.30		.19	.25	.30		.19	.25	.30		.19	.25	.30		.19	.25	.30		.19	.25	.30		.19	.25	.30		.19	.25	.30					
b1	.19	.22	.25		.19	.22	.25		.19	.22	.25		.19	.22	.25		.19	.22	.25		.19	.22	.25		.19	.22	.25		.19	.22	.25					
aaa	-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10					
bbb	-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10		-	-	.10					
N	8																																			

## NOTES:

- ALL DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M-1994
- DATUMS **-A-** AND **-B-** TO BE DETERMINED AT DATUM PLANE **-H-**
- DIMENSION E TO BE DETERMINED AT SEATING PLANE **-C-**
- DIMENSIONS D AND E1 ARE TO BE DETERMINED AT DATUM PLANE **-H-**
- DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED .15 mm PER SIDE
- DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED .25 mm PER SIDE
- DETAIL OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
- LEAD WIDTH DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT
- THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
- ALL DIMENSIONS ARE IN MILLIMETERS
- THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-153, VARIATION AA, AB-1, AB, AC, AD & AE

SYMBOL	OPTION T1								
	PGG14T1			N D T E					
	JEDEC VARIATION AB-1			N D T E					
MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX	
A	.90	1.10	1.20	.90	1.10	1.20	.90	1.10	1.20
A1	.05	.10	.15	.05	.10	.15	.05	.10	.15
A2	.80	1.00	1.05	.80	1.00	1.05	.80	1.00	1.05
D	4.90	5.00	5.10	4.5	4.90	5.00	5.10	4.5	4.90
E	6.20	6.40	6.60	3	6.20	6.40	6.60	3	6.20
E1	4.30	4.40	4.50	4.6	4.30	4.40	4.50	4.6	4.30
e	.65 BSC								
b	.19	.25	.30		.19	.25	.30		.19
b1	.19	.22	.25		.19	.22	.25		.19
c	.09	-	.20		.09	-	.20		.09
aaa	-	-	.10		-	-	.10		-
bbb	-	-	.10		-	-	.10		-
N	14								


TOLERANCES UNLESS SPECIFIED		IDT™	
DECIMAL	±	2975 Stender Way	Santa Clara, CA 95054
XXX	±	PHONE: (408) 727-8116	
XXXX±		WWW.IDT.COM	FAX: (408) 492-8874
TITLE PGC/PGC PACKAGE OUTLINE (PG OR PA TOPMARK CODE)			
4.4 mm BODY WIDTH TSSOP .65 mm PITCH			
SIZE	DRAWING No.	PSC-4056	
REV	DO NOT SCALE DRAWING		SHEET 2 OF 3

# Package Outline Drawings, cont. (8-, 14-, 16-, 20-TSSOP)

DATE CREATED	REV	DESCRIPTION	AUTHOR
08/25/98	02	ADD 14 & 16 LD	T. VU
07/10/99	03	ADD 8 LD	T. VU
5/23/01	04	ADDED TOPMARK TO TITLE	
10/14/04	05	ADD "GREEN" PGG NOMENCLATURE	TU VU
3/8/13	06	ADDED PACKAGE CODE	RAC
9/3/14	07	ADD TOLERANCE FOR A, A1, E AND b	CK LEE
3/10/17	08	ADD OPTION T1	R.TANH

NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

## LAND PATTERN DIMENSIONS

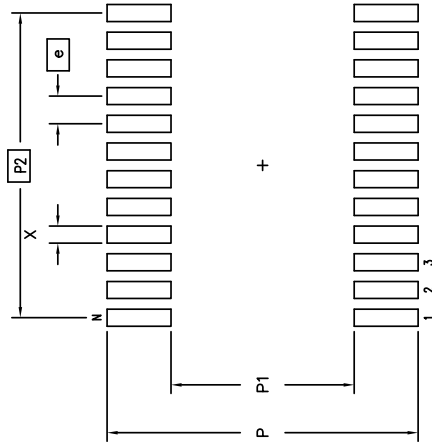

	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
P	7.20	7.40	7.20	7.40	7.20	7.40	7.20	7.40	7.20	7.40
P1	4.20	4.40	4.20	4.40	4.20	4.40	4.20	4.40	4.20	4.40
P2	1.95 BSC	3.90 BSC	4.55 BSC	5.85 BSC	7.15 BSC	8.45 BSC				
X	.30	.50	.30	.50	.30	.50	.30	.50	.30	.50
e	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC	.65 BSC
N	8	14	16	20	24	28				

TOLERANCES UNLESS SPECIFIED DECIMAL ANGULAR ± XXX± XXXX±

**IDT™**  
 2975 Stander Way  
 Santa Clara, CA 95054  
 PHONE: (408) 727-8116  
 WWW.IDT.COM FAX: (408) 492-8674

TITLE PGG/PGG PACKAGE OUTLINE  
 (PG OR PA TOPMARK CODE)  
 4.4 mm BODY WIDTH TSSOP .65 mm PITCH

SIZE C DRAWING No. PSC-4056  
 REV 08  
 DO NOT SCALE DRAWING SHEET 3 OF 3

## Ordering Information (industrial temperature range)

Part / Order Number	Marking	Shipping Packaging	Package	Temperature
5PB1102PGGI	see page 8	Tubes	8-TSSOP	-40 to +85°C
5PB1102PGGI8		Tape and Reel	8-TSSOP	-40 to +85°C
5PB1104PGGI		Tubes	8-TSSOP	-40 to +85°C
5PB1104PGGI8		Tape and Reel	8-TSSOP	-40 to +85°C
5PB1106PGGI		Tubes	14-TSSOP	-40 to +85°C
5PB1106PGGI8		Tape and Reel	14-TSSOP	-40 to +85°C
5PB1108PGGI		Tubes	16-TSSOP	-40 to +85°C
5PB1108PGGI8		Tape and Reel	16-TSSOP	-40 to +85°C
5PB1110PGGI		Tubes	20-TSSOP	-40 to +85°C
5PB1110PGGI8		Tape and Reel	20-TSSOP	-40 to +85°C
5PB1102CMGI		Cut Tape	8-DFN	-40 to +85°C
5PB1102CMGI8		Tape and Reel	8-DFN	-40 to +85°C
5PB1104CMGI		Cut Tape	8-DFN	-40 to +85°C
5PB1104CMGI8		Tape and Reel	8-DFN	-40 to +85°C
5PB1104CMGI/W*		Tape and Reel	8-DFN	-40 to +85°C
5PB1106CMGI		Cut Tape	16-QFN	-40 to +85°C
5PB1106CMGI8		Tape and Reel	16-QFN	-40 to +85°C
5PB1108CMGI		Cut Tape	16-QFN	-40 to +85°C
5PB1108CMGI8		Tape and Reel	16-QFN	-40 to +85°C
5PB1110NDGI		Tubes	20-QFN	-40 to +85°C
5PB1110NDGI8	Tape and Reel	20-QFN	-40 to +85°C	

\* "/W" stands for tape and reel with pin 1 orientation: EIA-481-D. All other tape and reels options come with EIA-481-C pin 1 orientation.

## Ordering Information (extended temperature range)

Part / Order Number	Marking	Shipping Packaging	Package	Temperature
5PB1102PGGK	see page 9	Tubes	8-TSSOP	-40 to +105°C
5PB1102PGGK8		Tape and Reel	8-TSSOP	-40 to +105°C
5PB1104PGGK		Tubes	8-TSSOP	-40 to +105°C
5PB1104PGGK8		Tape and Reel	8-TSSOP	-40 to +105°C
5PB1106PGGK		Tubes	14-TSSOP	-40 to +105°C
5PB1106PGGK8		Tape and Reel	14-TSSOP	-40 to +105°C
5PB1108PGGK		Tubes	16-TSSOP	-40 to +105°C
5PB1108PGGK8		Tape and Reel	16-TSSOP	-40 to +105°C
5PB1110PGGK		Tubes	20-TSSOP	-40 to +105°C
5PB1110PGGK8		Tape and Reel	20-TSSOP	-40 to +105°C
5PB1102CMGK		Cut Tape	8-DFN	-40 to +105°C
5PB1102CMGK8		Tape and Reel	8-DFN	-40 to +105°C
5PB1104CMGK		Cut Tape	8-DFN	-40 to +105°C
5PB1104CMGK8		Tape and Reel	8-DFN	-40 to +105°C
5PB1106CMGK		Cut Tape	16-QFN	-40 to +105°C
5PB1106CMGK8		Tape and Reel	16-QFN	-40 to +105°C
5PB1108CMGK		Cut Tape	16-QFN	-40 to +105°C
5PB1108CMGK8		Tape and Reel	16-QFN	-40 to +105°C
5PB1110NDGK		Tubes	20-QFN	-40 to +105°C
5PB1110NDGK8		Tape and Reel	20-QFN	-40 to +105°C

“G” after the two-letter package code denotes Pb-Free configuration, RoHS compliant.

## Revision History

Date	Description of Change
March 20, 2015	Initial release.
May 19, 2015	1. Expanded Output Enable function text in General Description, and within the note under "Output Logic Table". 2. Updated all "Buffer Additive Phase Jitter, RMS" conditions from 125MHz to 156.25MHz.
June 9, 2015	1. Corrected typos in part numbers in DC Electrical Tables. 2. Updated existing Output Rise/Fall Time specs for 5pF load. 3. Added additional Output Rise/Fall specs for 2pF load.
June 15, 2015	Fixed typos in Output Rise/Fall Time 5pF specs for CL conditions; should be 5pF; not 2pF.
June 22, 2015	Changed 3.3V Operating Voltage spec from 3.15V min to 3.135V min; 3.45V max to 3.465V max.
August 24, 2015	1. Added 5PB1104CMGIW orderable part. 2. Updated Abs Max Ratings table for "Output Enable and All outputs" and "CLKIN"; changed -0.5 V to -0.4 and added -0.4 to... respectively.
May 13, 2016	Replace NDG20 package outline drawing with latest version.
December 15, 2016	Updated marking diagrams for all TSSOP devices.
February 10, 2017	Change Propagation Delay maximum spec in 1.8V AC electrical characterization table from 2.2 to 2.5ns.
March 28, 2017	1. Updated Propagation Delay specifications for 5PB1106/08/10; 2.5V and 3.3V. 2. Updated output-output skew maximum specifications for 5PB1106; 1.8V, 2.5V, 3.3V. 3. Updated legal disclaimer. 4. Updated package outline drawings.
May 17, 2017	Added thermal theta JA, JB, JC values to all parts.
May 23, 2017	1. Updated 3.3V, 2.5V, and 1.8V IDD typical and maximum values. 2. Updated ordering information.
September 19, 2017	Updated Input High Voltage, CLKIN (VIH) maximum values.
February 20, 2018	Updated absolute maximum supply voltage from 3.465V to 3.8V.



**Corporate Headquarters**  
6024 Silver Creek Valley Road  
San Jose, CA 95138 USA  
[www.idt.com](http://www.idt.com)

**Sales**  
1-800-345-7015 or 408-284-8200  
Fax: 408-284-2775  
[www.idt.com/go/sales](http://www.idt.com/go/sales)

**Tech Support**  
[www.idt.com/go/support](http://www.idt.com/go/support)

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit [www.idt.com/go/glossary](http://www.idt.com/go/glossary). Integrated Device Technology, Inc.. All rights reserved.