

## FEATURES

### Ultra-low touch sensor power consumption\*

- Full power operating mode (typical): <100  $\mu$ W (VDD=1.8V)
- Low power operating mode (typical): <40  $\mu$ W (VDD=1.8V, 100ms sleep cycle)
- Shutdown mode (typical): <1  $\mu$ W

### Versatile, accurate CDC

- Up to 8 capacitive sensors
- Dynamically configurable touch threshold sensitivity settings

### Fully configurable hysteresis and debounce

### Automatic calibration algorithms

- Auto environmental compensation
- Integrated noise immunity algorithms for high-EMI applications

### Integrated touch preference modes

- Strongest single touch / two touches
- Unrestricted (all) touches

### Built-in slider/scroll support

- Location, scroll direction, and 2x interpolation supported natively


### Advanced Proximity Sense

- Detect approaching object before touch event to enhance wake up time and optimize user experience

### Power-On Touch Detection

- Detect touch event upon power up without worry of sensors calibrating out fingers

\* I<sup>2</sup>C with no active reads

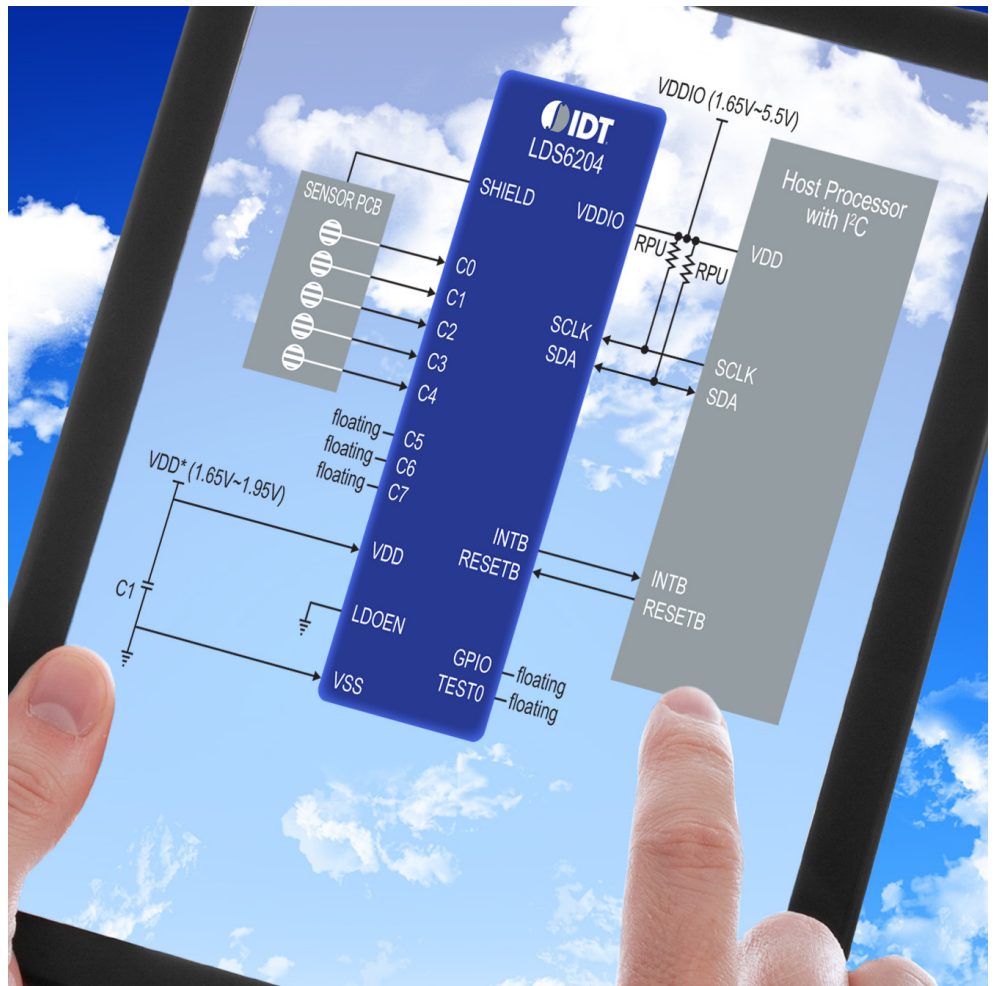

## Description

The LDS6200 family of capacitance touch controllers from Integrated Device Technology is optimized for the easy implementation of touch-based input controls including buttons, sliders, scroll wheels, and proximity sensors. A low power programmable capacitance-to-digital converter (CDC) supports up to 8 touch sensor inputs.

The touch inputs are directed through an integrated switch matrix to a sigma-delta CDC which senses changes in the external sensor array. When a change in capacitance occurs that is larger than the user defined threshold, a touch event is recognized and the host processor is notified via an interrupt pin.

On-chip calibration logic continuously monitors the environment and automatically adjusts touch sensitivity to ensure robust performance. Proprietary noise-filtering algorithms may also be activated to prevent false sensor activation in noisy system environments. The LDS6200 family offers an I<sup>2</sup>C compatible interface. A general-purpose input/output (GPIO) and an interrupt output are also provided for additional communication with the host processor.

## BENEFITS

- Ease-of-use and flexible configurability with optimized, state machine architecture
- Longer battery life enabled with ultra-low power consumption
- Low BOM cost and minimized solution footprint using bare minimum of external components
- Robust touch performance via proprietary noise-filtering algorithms


## APPLICATIONS

- Mobile handsets and smartphones
- Personal media players (MP3/MP4)
- Gaming devices
- Remote controls
- Television, audio/video
- Set-top boxes, multi-function printers, enterprise telephony
- White goods
- Industrial and medical devices

Discover what IDT know-how can do for you:  
[www.IDT.com/go/Touch](http://www.IDT.com/go/Touch)

## LDS6200 Touch Family - Ideal Solution for Portable and “Green” Applications

The LDS6200 is optimized for ultra-low power consumption. In full power mode, sensor conversion and calibration occur continuously, minimizing the time between touch event and touch detection. With its ultra- low touch sensor current consumption of <55  $\mu\text{A}$  (typical at 1.8V), the LDS6200 products may be operated continuously in full power mode, eliminating the need for introduced latencies that can cause noticeable delays and degrade the user experience. Where power consumption is of the utmost importance, low power modes with configurable latencies may be utilized to further reduce current below 20  $\mu\text{A}$  (100ms sleep cycle). The LDS6200 family is optimized for a minimized solution footprint, with the functionality of multiple components consolidated into a single device and a bare minimum of required external passive components. A variety of package options are available including a 3mm x 3mm 16 lead and 20 lead TQFN package, and larger SOIC packages for applications requiring a wider lead pitch.

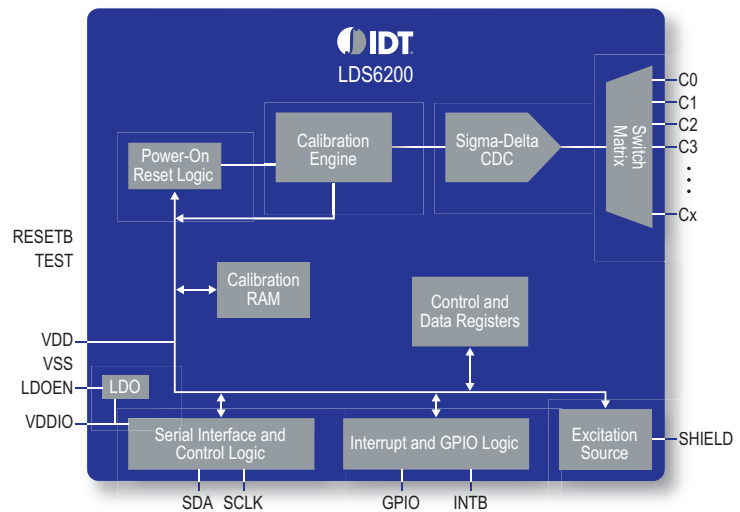

Part Number	Number of Touch Sensors	Built-in Slider/ Scroll Functionality	Full Hysteresis/ Debounce Configurability	Power On Touch Detection	Advanced Proximity Sense Capability	I/O Voltage and Touch Voltage	Interface	Package
LDS6204NTGI	Up to 8	✓	✓	✓	✓	1.65V to 5.5V	I <sup>2</sup> C	TQFN 20, 3mm x 3mm
LDS6204SOGI	Up to 8							SOIC 20, 7.5mm x 12.8mm
LDS6203NTGI	Up to 6							TQFN 20, 3mm x 3mm
LDS6203SOGI	Up to 6							SOIC 20, 7.5mm x 12.8mm
LDS6202NTGI	Up to 4							TQFN 16, 3mm x 3mm
LDS6202DCGI	Up to 4							SOIC 16, 3.9mm x 9.9mm
LDS6201NTGI	Up to 2							TQFN 16, 3mm x 3mm
LDS6201DCGI	Up to 2							SOIC 16, 3.9mm x 9.9mm

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties. IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners. © Copyright 2010. All rights reserved.

OV\_LDS6200FAMILY\_REV1110