

Description

This document details the custom configuration that is programmed into the one-time-programmable (OTP) memory of the 9FGV1005Q507LTGI. Please refer to the device datasheet for further information about the device.

General Configuration

Parameter	Value	Units
Device I ² C Address	Primary 0xD0	
Crystal Load Capacitance	8	pF

Frequency Overview

Parameter	Configuration 0	Configuration 1	Configuration 2	Configuration 3	Units
Internal Crystal	50	50	50	50	MHz
REF 0	Off	Off	Off	Off	MHz
Output 0	50	100	125	156.25	MHz
Output 1	50	100	125	156.25	MHz

Configuration 0 Parameters: SEL[1:0] = 00

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LVDS	LVDS	
Frequency	—	50	50	MHz
LP-HCSL Impedance	—	—	—	Ω

Configuration 1 Parameters: SEL[1:0] = 01

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LVDS	LVDS	
Frequency	—	100	100	MHz
LP-HCSL Impedance	—	—	—	Ω


Configuration 2 Parameters: SEL[1:0] = 10

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LVDS	LVDS	
Frequency	—	125	125	MHz
LP-HCSL Impedance	—	—	—	Ω

Configuration 3 Parameters: SEL[1:0] = 11

Parameter	REF 0	Output 0	Output 1	Units
Crystal Frequency	50	50	50	MHz
Default Output Status	Off	On	On	
VDDO Voltage	3.3	3.3	3.3	V
Output Type	LVC MOS	LVDS	LVDS	
Frequency	—	156.25	156.25	MHz
LP-HCSL Impedance	—	—	—	Ω

Typical Phase Jitter at 156.25MHz

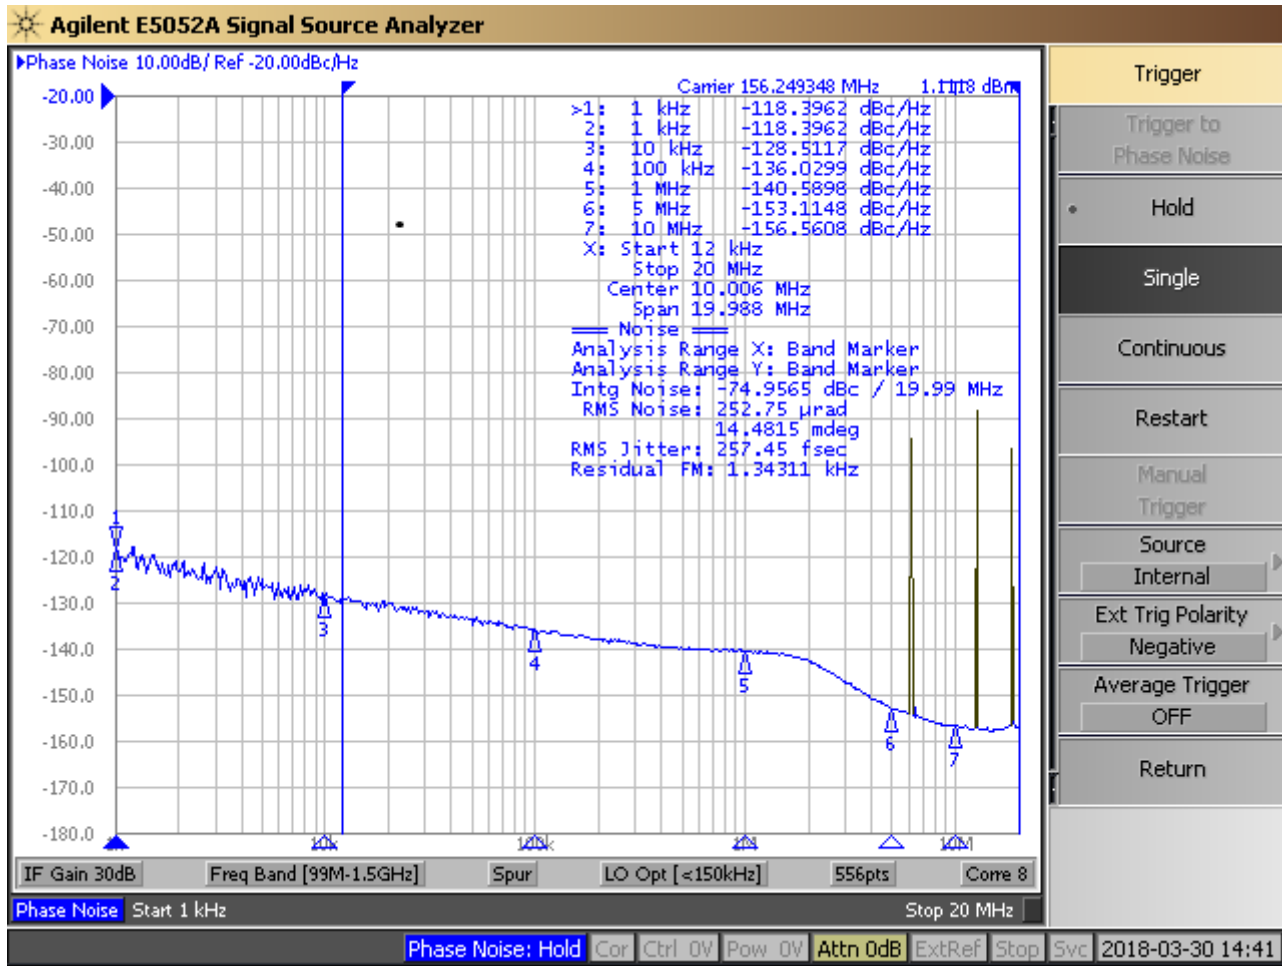

9FGV1005Q507LTGI Ordering Information

Orderable Part Number	Marking	Package	Carrier Type	Temperature
9FGV1005Q507LTGI	55071 YWW xxx	3 × 3 mm, 0.5mm pitch 16-LGA	Tray	-40° to +85°C
9FGV1005Q507LTGI8	55071 YWW xxx	3 × 3 mm, 0.5mm pitch 16-LGA	Tape and Reel	-40° to +85°C

Marking notes:

- ¹ Line 1: truncated part number.
- ² "YWW" is the last digit of the year and work week that the part was assembled.
- ³ "xxx" denotes the lot number.

Revision History

Revision Date	Description of Change
May 14, 2018	Initial release.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.