



VersaClock® III Evaluation Board Setup Guide

VersaClock III Eval Board Getting Started Guide	p. 2
To Configure the Board	p. 3-4
To Program Devices Using the Socket Board	p. 5


VersaClock® III Eval Board Getting Started Guide

1 Download and Install the Software


- Download the software from www.idt.com/go/versaclock3
- Install USB Driver
- Install VersaClock III Application

2 Set Jumpers and DIP Switches Correctly

- See next page

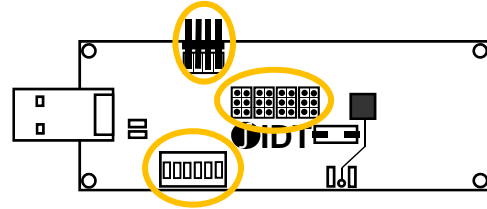

3 Insert Eval Board into PC USB

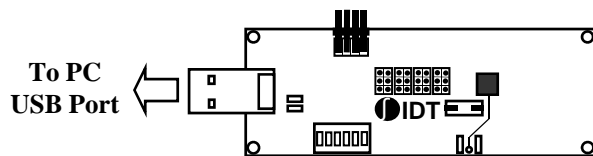

4 Launch VersaClock III Application

- If the application is already launched, please close the application and re-launch it again


5 Configure the Frequencies

- Refer to “Configuring a Device” section in VersaClock III User Guide

6 Program the Device

- Refer to “Programming a Device” section in VersaClock III User Guide

To Configure the Board

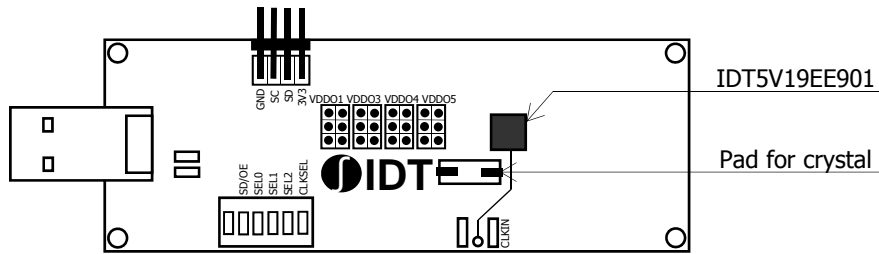


To Program with USB Interface

- USB interface will translate into I2C interface
- Short SC jumper(J5B) and SD jumper(J5C)



To Select I/O voltages

- 1.8V, 2.5V and 3.3V power supplies are available
- Select VDDO voltages
- For 5V19EE901 and 5V49EE901, all jumpers should be set to 3.3V



To Select Clock Source

- Connect external clock source to CLKIN, or mount a crystal
- Set CLKSEL to 0 for crystal, 1 for CLKIN in manual switchover mode
- CLKSEL is ignored in automatic switchover mode




To Select Configuration

- Up to six configurations are supported




To Enable Outputs

- Polarity is programmable (Default is active LOW)



To Configure the Board

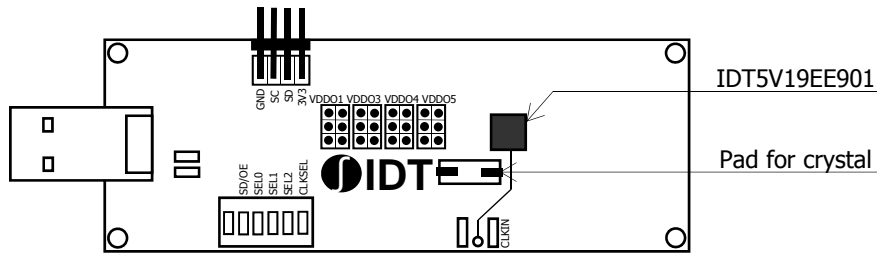


❑ To Configure the Output I/O standard

	Output Pair A		Output Pair B		Output Pair C		Output Pair D	
	Out 1	Out2	Out3	Out6	Out4	Out4b	Out5	Out5b
LVTTTL	Leave R33, R34 and R35 open		Leave R37, R38 and R39 open		Leave R20, R21 and R22 open		Leave R23, R27 and R32 open	
LVDS	Leave R34 and R35 open Install 100 Ω resistor at R33		Leave R38 and R39 open Install 100 Ω resistor at R37		Leave R21 and R22 open Install 100 Ω resistor at R20		Leave R23 and R27 open Install 100 Ω resistor at R32	
LVPECL	Leave R33 and R45 open Install 50 Ω resistor at R34 and R35 and 0 Ω resistor at R44		Leave R37 and R49 open Install 50 Ω resistor at R38 and R39 and 0 Ω resistor at R48		Leave R20 and R43 open Install 50 Ω resistor at R21 and R22 and 0 Ω resistor at R42		Leave R32 and R47 open Install 50 Ω resistor at R23 and R27 and 0 Ω resistor at R46	
HCSL	Replace R3 and R4 with 33Ω resistors Leave R33 and R44 open Install 50 Ω resistor at R34 and R35 and 0 Ω resistor at R45		Replace R1 and R2 with 33Ω resistors Leave R37 and R48 open Install 50 Ω resistor at R38 and R39 and 0 Ω resistor at R49		Replace R7 and R8 with 33Ω resistors Leave R20 and R42 open Install 50 Ω resistor at R21 and R22 and 0 Ω resistor at R43		Replace R30 and R31 with 33Ω resistors Leave R23 and R46 open Install 50 Ω resistor at R23 and R27 and 0 Ω resistor at R47	

❑ Output Load

- The trace capacitance for each output is approximately 7pF.
- For additional capacitance, install a 8pF or any value of capacitor at C24 for Out0, C25 for Out1, C26 for Out2, C29 for Out3, C30 for Out6, C23 for Out4, C22 for Out4b, C28 for Out5, C27 for Out5b

To Program Devices Using the Socket Board

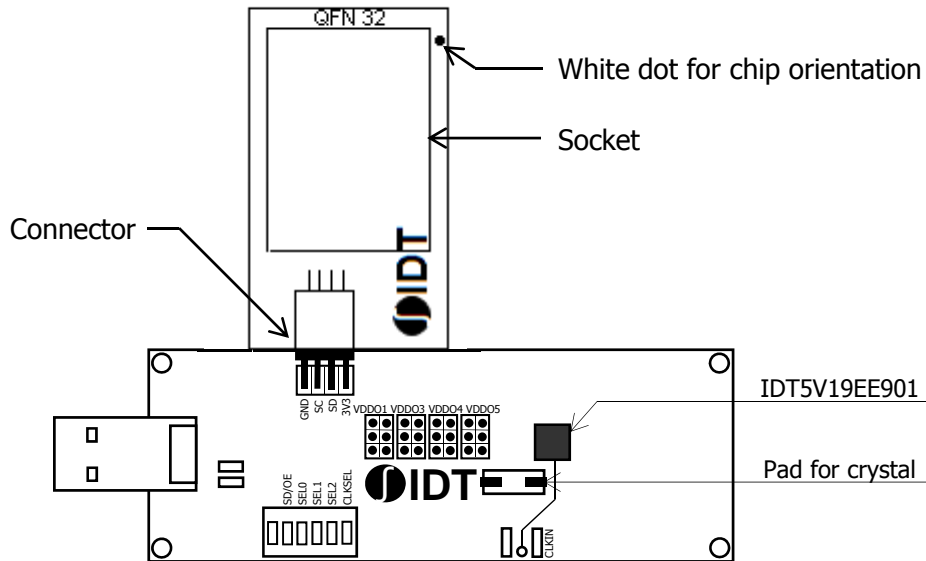

□ Steps of Use

- Remove the two center jumpers on the board connector that would be plugged without the socket board;
- Plug in the socket board as shown above
- Place the device in the socket – please align the pin-1 dot on the chip with the white dot on the socket board, see above.
- Plug in the assembled board into USB port of your PC and continue on the programming process as described previously.

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners. Copyright 2013. All rights reserved.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.