

Important Notice

Restrictions in Use

IDT's ZSLS7025PCB-D1V1 Demonstration Kit hardware is designed for ZSLS7025 demonstration, evaluation, laboratory setup, and module development only. The ZSLS7025PCB-D1V1 Demonstration Kit hardware must not be used for module production or production test setups.

Disclaimer

IDT shall not be liable for any damages arising out of defects resulting from

- (i) delivered hardware and software
- (ii) non-observance of instructions contained in this manual and in any other documentation provided to user, or
- (iii) misuse, abuse, use under abnormal conditions or alteration by anyone other than IDT.

To the extent permitted by law, IDT hereby expressly disclaims and user expressly waives any and all warranties, whether express, implied or statutory, including, without limitation, implied warranties of merchantability and of fitness for a particular purpose, statutory warranty of non-infringement and any other warranty that may arise by reason of usage of trade, custom or course of dealing.

Contents

| | | |
|------|---|---|
| 1 | Kit Contents | 3 |
| 2 | Kit Description | 3 |
| 2.1. | ZSLS7025 Overview | 3 |
| 2.2. | ZSLS7025PCB-D1V1 Demonstration Kit Overview | 3 |
| 2.3. | Power Supply | 4 |
| 2.4. | Connections | 5 |
| 2.5. | Circuit Operation | 5 |
| 2.6. | Schematic Diagram | 6 |
| 2.7. | ZSLS7025-D1V1 Demonstration Kit Bill of Materials | 7 |
| 3 | Ordering Information | 8 |
| 4 | Related Documents | 8 |
| 5 | Glossary | 8 |
| 6 | Document Revision History | 9 |

List of Figures

Figure 2.1 ZSLS7025PCB-D1V1 Demonstration Board (Top View)4
Figure 2.2 ZSLS7025PCB-D1V1 Schematic Diagram..... 6

List of Tables

Table 2.1 Connections for the Demonstration Board5
Table 2.2 Components Used in the ZSLS7025-D1V1 Demonstration Board.....7

1 Kit Contents

The ZSLS7025PCB-D1V1 Demonstration Kit includes the following:

- ZSLS7025PCB-D1V1 Demonstration Board v.X (where X refers to the current version)
- Five ZSLS7025 samples, SOP8
- ZLED-PCB10 Test PCB with 12 white 0.5W LEDs
- *ZSLS7025PCB-D1V1 Demonstration Kit Start-up Information*
- *Kit Disclaimer*

The ZSLS7025PCB-D1V1 Demonstration Kit is fully assembled and ready for immediate operation.

2 Kit Description

2.1. ZSLS7025 Overview

The ZSLS7025PCB-D1V1 Demonstration Kit provides a quick and easy method for evaluating the ZSLS7025 within its basic application circuit. Reading the *ZSLS7025 Data Sheet* before using the Demonstration Kit is recommended for understanding the operation of the ZSLS7025 and the Demonstration Board.

The ZSLS7025 is a constant current boost converter. Typical applications require an external MOSFET switch. The boost converter topology allows series connection of white LEDs so that the LED currents are identical for uniform brightness with an LED string voltage greater than the input supply voltage. The nominal output current can be set by an external resistor with the option to also dim the brightness of the LEDs with a PWM signal or DC control voltage. A low 0.3V (nominal) feedback voltage minimizes power loss in the current setting resistor for better efficiency. The over-voltage protection (OVP) circuit safeguards the chip and the system even if the load is not connected. The ZSLS7025 is available in an SOP-8 package.

The ZSLS7025 IC is designed for LED current drive applications of up to 2A or higher.

The main features of ZSLS7025 driver are

- 5VDC to 100VDC supply voltage
- High efficiency: up to 95 %
- PWM or DC voltage dimming control
- Adjustable over-voltage protection
- Over-temperature protection

2.2. ZSLS7025PCB-D1V1 Demonstration Kit Overview


The Demonstration Board contains a standard 4-pin terminal connector to allow the user to easily connect and supply an LED board. The Demonstration Board also has two LED power pads (LED+ and LED-) to provide more flexibility in supplying a power LED or LED string.

The board includes an external power MOSFET switch. The layout with any switching regulator is crucial to minimize radiated EMI. A shielded inductor is selected to minimize radiated EMI. This reference design keeps the critical trace lengths to a minimum. The ground plane has been maximized around critical areas.

The Demonstration Board offers the following features and benefits:


- Wide input voltage range (see section 2.4)
- Standard 2.54mm 4-pin header for attaching LEDs and additional duplicate surface-mounted device (SMD) pads (LED- , LED+)
- Standard 2.54mm 2-pin male header and alternative duplicate SMD pads for power supply
- Standard 2.54mm 3-pin male header for dimming the LED brightness with an external PWM signal or DC control voltage
- All devices are SMD and on the same side of the board (as shown in the top view given in Figure 2.1)
- Maximized power ground copper on top and bottom sides to minimize radiated EMI
- Cooling pad (bottom layer) with many vias for the power MOSFET switch
- The high current paths are as short as possible to ensure system precision and efficiency
- No ground plane under the EMI radiated components to prevent noise injection in the ground plane

Figure 2.1 ZSLS7025PCB-D1V1 Demonstration Board (Top View)

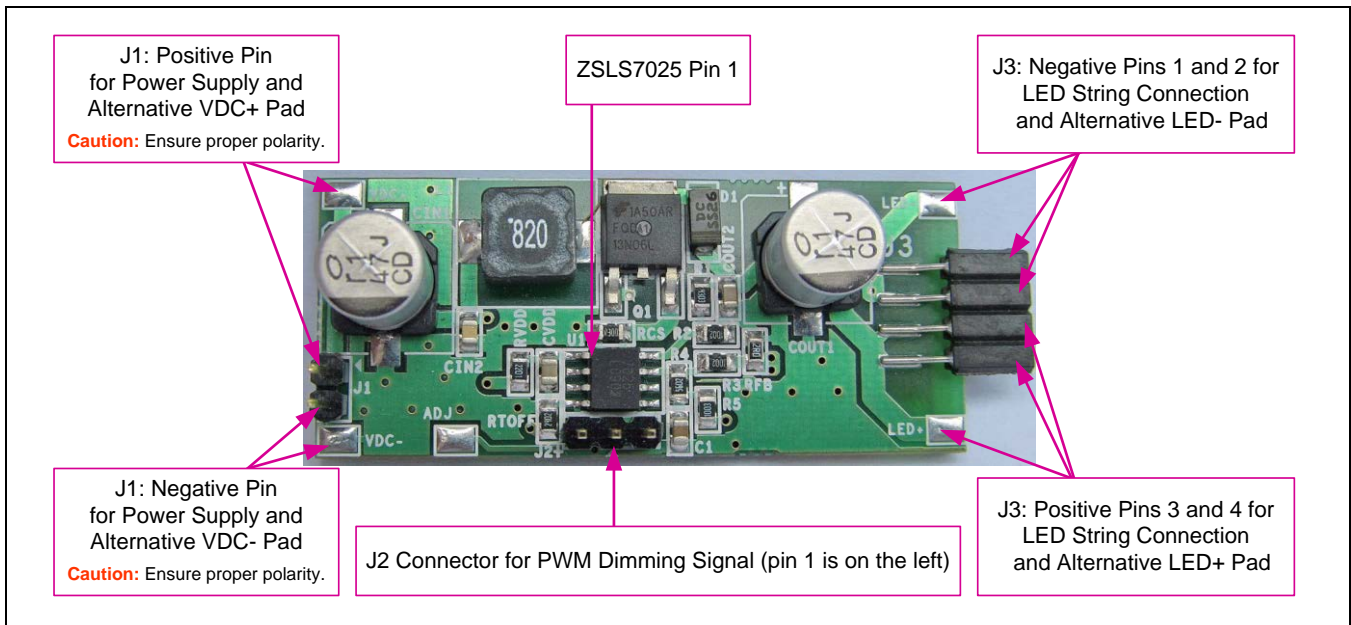

2.3. Power Supply

The board requires a DC power supply of $\geq 5V$ for the LED string that also must be 3V lower than the normal working output voltage (the total forward voltage of the LED or the LED string). It can be connected either via J1 or alternative pads as described in Table 2.1. The maximum supply voltage of the ZSLS7025PCB-D1V1 is 19V due to the sizing of the components used on the boards. See the *ZSLS7025 Data Sheet* for information on designing the circuit to allow higher input DC power supply values.

 **Caution:** Ensure proper polarity when making connections. The system is not reverse polarity protected.

2.4. Connections

Refer to Figure 2.1 for identification of the following connections for the Demonstration Board.

Table 2.1 Connections for the Demonstration Board

| Connector | Description |
|-----------|---|
| J1 | Standard 2.54mm 2-pin male header for power supply. Input voltage range: 5VDC to 19VDC. See section 2.3 for additional requirements. J1 is an alternative connection that can be used instead of the VDC+ and VDC- pads. |
| J2 | Standard 2.54mm 3-pin male header for dimming the brightness of the LEDs with an external PWM signal or DC control voltage. Pin1: VDC(+) Pin 2: Dimming signal – PWM or DC Voltage Pin 3: GND |
| J3 | Standard 2.54mm 4-pin female header with the following connections. Pins 1 and 2: LED- negative pole for voltage output to drive the LED string (also see LED- pad) Pins 3 and 4: LED+ positive pole for voltage output to drive the LED string (also see LED+ pad) |
| VDC+ | Positive pad for an optional alternative connection for the power supply (instead of J1 positive pin). |
| VDC- | Negative pad for an optional alternative connection for the power supply (instead of J1 negative pin). |
| LED+ | Positive pad for an optional alternative connection for the positive ZLED7025 driver supply voltage (instead of J3, pins 3 and 4). |
| LED- | Negative pad for an optional alternative connection for the negative ZLED7025 driver supply voltage (instead of J3, pins 1 and 2). |

2.5. Circuit Operation

The nominal output current of the Demonstration Board is set to 150mA, but it can be adjusted by changing the set resistor R_{FB} according to the formula:

$$I_{LED} = V_{FB} / R_{FB}$$

Where

I_{LED} = Average output current through the LED(s) in amperes. $I_{LED} = 0.15A$ for $R_{FB} = 2\Omega$.

V_{FB} = Internal feedback reference voltage of the ZSLS7025: approx. 0.3V.

R_{FB} = Nominal current output setting resistor in ohms, which is approximately 2Ω on the Demonstration Board


The over-voltage protection level is set to 44V for the Demonstration Board, which limits the maximum LED string voltage, is determined by the following formula for V_{OVP} in volts:

$$V_{OVP} = 1V * (R1+R2) / R2$$

$V_{OVP} = 44V$ for $R1 = 430\text{ k}\Omega$ and $R2 = 10\text{ k}\Omega$. Note that the capacitors must be re-designed for higher voltages if a higher over-voltage protection level is required. For detailed calculations related to switching frequency and dimming control, refer to the *ZSLS7025 Data Sheet*.

2.6. Schematic Diagram

Figure 2.2 ZSLS7025PCB-D1V1 Schematic Diagram

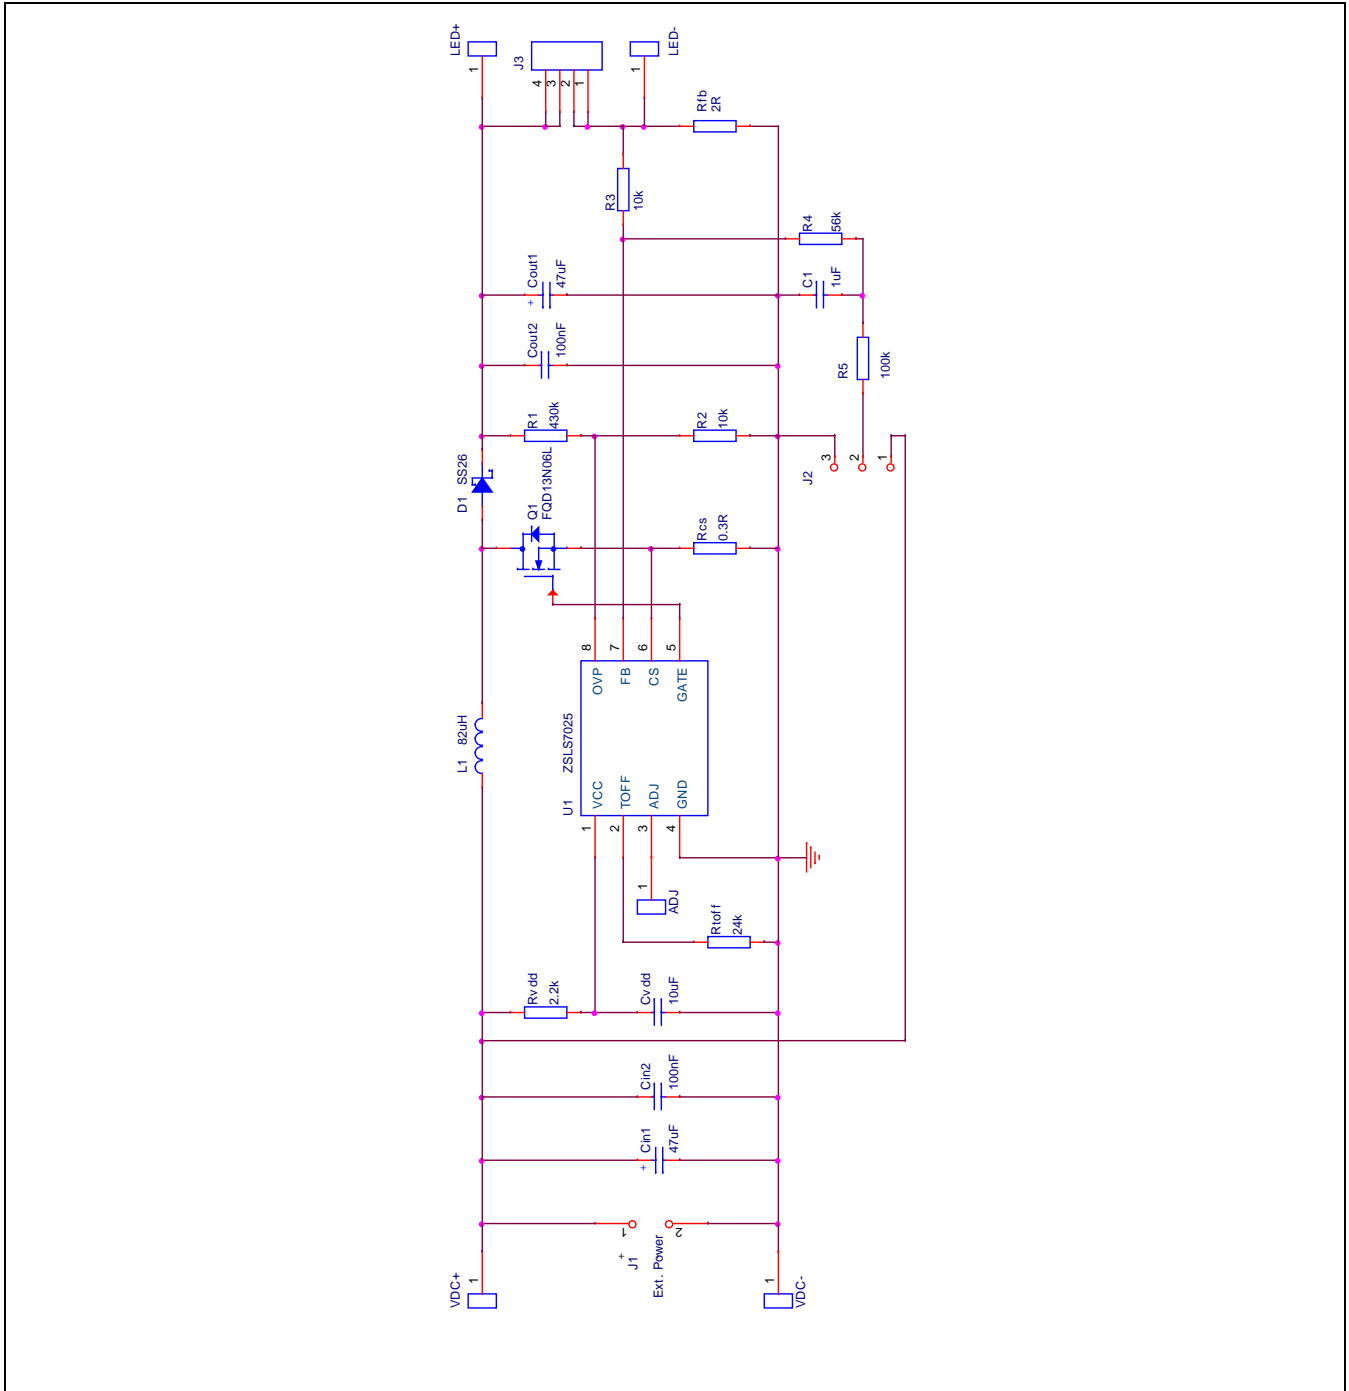

2.7. ZSLS7025-D1V1 Demonstration Kit Bill of Materials

Table 2.2 Components Used in the ZSLS7025-D1V1 Demonstration Board

| Item | Manufacturer Part | Manufacturer | Description | Pkg | Type |
|-------|-------------------|--------------------|------------------------|---------------------|-------------------------|
| U1 | ZSLS7025 | IDT | Converter IC | SOP8 | |
| Q1 | FQD13N06L | Fairchild | n-FET | D-PAK | 60V / 7A / 4.8nC |
| D1 | SS26 | Vishay | Schottky diode | SMA | 60V / 2A |
| Cin1 | | | Electrolytic cap | d8 x 10 SMD | 47u / 63V |
| Cvdd | | | MLCC | 0805 | 10u / 16V / X5R |
| Cout1 | | | Electrolytic cap | d8 x 10 SMD | 47u / 63V |
| C1 | | | MLCC | 0805 | 1u / 16V / X5R |
| Cin2 | | | MLCC | 0805 | 100n / 50V / X7R |
| Cout2 | | | MLCC | 0805 | 100n / 100V / X7R |
| Rvdd | | | Chip resistor | 0805 | 2.2kΩ / 1% |
| Rtoff | | | Chip resistor | 0805 | 24kΩ / 1% |
| Rcs | | | Chip resistor | 0805 | 0.3RΩ / 1% |
| R1 | | | Chip resistor | 0805 | 430kΩ / 1% |
| R2 | | | Chip resistor | 0805 | 10kΩ / 1% |
| R3 | | | Chip resistor | 0805 | 10kΩ / 1% |
| R4 | | | Chip resistor | 0805 | 56kΩ / 1% |
| R5 | | | Chip resistor | 0805 | 100kΩ / 1% |
| Rfb | | | Chip resistor | 0805 | 2R / 1% / 100ppm |
| L1 | 744777182 | Würth | SMD inductor, shielded | 7345 | 82uH / 0.9A sat / 0.26Ω |
| J1 | SL 11 124 | Fischer Elektronik | Header, male | 2x1 / 2.54mm TH | 2-pin / 0.63mm |
| J2 | SL 11 124 | Fischer Elektronik | Header, male | 3x1 / 2.54mm TH | 3-pin / 0.63mm |
| J3 | BL17SMD.04Z | Fischer Elektronik | Header, female | 4x1 / 2.54mm SMT | 4-pin / 0.63mm |

3 Ordering Information

| Product Sales Code | Description |
|--------------------|---|
| ZSLS7025PCB-D1V1 | ZSLS7025PCB-D1V1 Demonstration Kit V1.0 includes 5 IC samples |

4 Related Documents

| Document |
|--------------------|
| ZSLS7025 Datasheet |

Visit www.IDT.com/ZSLS7025 or contact your nearest sales office for the latest version of these documents.

5 Glossary

| Term | Description |
|--------|---|
| LED | Light Emitted Diode |
| EMI | Electromagnetic Interference |
| MOSFET | Metal–Oxide–Semiconductor Field Effect Transistor |
| PCB | Printed Circuit Board |
| PWM | Pulse Width Modulation |
| SOP8 | 8-Pin Small Outline Package |

6 Document Revision History

| Revision | Date | Description |
|----------|-------------------|--------------------------|
| 1.00 | September 4, 2013 | Initial release |
| | April 19, 2016 | Changed to IDT branding. |

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.