

---

## PureTouch™\* Capacitive Touch Sensor IC Configuration Registers

### Detailed Register Information and Default Values

---

#### Purpose:

The purpose of this document is to provide detail on the registers available for configuration and performance optimization of the LDS6108 and LDS6128 devices

#### Scope:

This register document covers the LDS6108 (16-channel touch controller) and the LDS6128 (16-channel touch controller with integrated LED drivers). ***The other members of the LDS61xx family have their own Detailed Register documents as the relevant bit locations vary by device.***

The LED-related registers apply to the LDS6128 device only and may be ignored when using the LDS6108.

#### Required Initialization:

Not all registers need to be initialized under normal usage conditions, as the default conditions may be appropriate and certain functions and features may not be used in the application.

However, the following registers should be initialized in all cases, as their proper configuration is necessary for fundamental operation.

- **0x00A: DCM configuration**
  - Pins C6/DCM14 and C7/DCM15 are set as DCM pins by default. They must be reset during initialization if not used as DCM pins
- **0x041 and 0x042: Touch Sensor Enable**
  - Only those channels to be used as sensor input should be set to the “1” state. All other bits in these registers (including reserved/unused bits) should be set to “0”
- **0x043 and 0x044: Touch Interrupt Enable**
  - To enable proper interrupt operation, these registers should be configured identically to the Touch Sensor Enable registers 0x041 and 0x042
- **0x060-0x073 (non-contiguous, memory page 1): Touch Threshold Levels**
  - Sets the touch threshold levels which affect the sensitivity of each sensor.
  - ***Register 0x05F should be set to Memory Page 1 prior to writing to these registers***

If using Low Power/Sleep mode, the following registers should be initialized:

- **0x055: Idle Configuration**
  - Set value to 24 (dec) to enable sleep period configuration (0x056) in 1ms increments using default 1024 decimation rate
- **0x056: Sleep Period Configuration**
  - Sets the sleep period between scan cycles. See the LDS61xx AN1 application note for more information
- **0x003: Sleep Wait**
  - Sets the time the device will wait after the last touch before reverting back to Low Power mode

### PureTouch™\* Capacitive Touch Sensor IC Configuration Registers

#### Detailed Register Information and Default Values

---

##### Recommended Initialization:

The following registers are recommended to be initialized for optimized operation.

- **0x04E: SELC\_Unit Configuration**

- Determines SELC unit steps utilized during calibration process. Use of adaptive SELC algorithm will accelerate calibration process. Recommended register setting: 5000h.

- **0x051: Ambient Calibration**

- Determines how quickly ambient calibration occurs when no-touch value drifts above/below the plus/minus noise region. Recommended register setting: 0A1Fh.

- **0x052: Recalibration Configuration**

- Sets the delay before a recalibration is initiated when capacitive signal is above the ambient threshold and below the touch threshold. The default IC value (99 decimal) results in a delay of “0.8s x # of active sensor channels”. When few sensor channels are utilized, this may result in too short a delay. This delay should be at least 4-5s to avoid calibrating out an approaching finger.

- **0x053: Stuck Touch**

- Determines how quickly forced recalibration occurs when touch persists for abnormally long length of time. Optimal setting depends upon usage model.

- **0x060-0x073 (non-contiguous, memory page 0): Initial SELC**

- Sets the starting value for SELC for each sensor. Loading initial SELC values for each sensor will result in faster recalibration times. Recommended setting determined during prototype stage.

- **0x075: Touch Hysteresis**

- Sets the amount of capacitance value units below Touch Threshold to still be considered a continuation of current/active touch. Recommended register setting: 0005h to 000Ah.

**By default, the INTB (Interrupt) pin is configured as an active-low CMOS output, with a fixed duration of 2 $\mu$ s when a touch or untouch event occurs.** INTB may also be configured as active high (0x008 bit 15 = 1) and as an open drain output requiring a pull-up or pull-down resistor (0x008 bit 3 = 1), depending upon system requirements.

**Finally, INTB may also be configured in “Read Reset” mode (0x008 bit 1 = 1), in which case Touch Status Register 0x045 must be read in order to release/reset the INTB pin. Read Reset mode corresponds to the default INTB mode of operation of IDT’s LDS60xx family of products.**

# LDS6108/6128

## Configuration Register Map and Description



### PureTouch™\* Capacitive Touch Sensor IC Configuration Registers

#### Detailed Register Information and Default Values

##### Functional Groupings

Function	Register	Description
RESET	0x000	Cold Reset
	0x001	Software Reset
POWER	0x002	Normal Operation, Low Power Mode, Shutdown
	0x055	Idle Time - For Low Power Mode
	0x056	Sleep Configuration
	0x003	Sleep Wait
INTERRUPT	0x008	INTERRUPT Configuration
	0x043-0x044	Touch Interrupt Enable
GPIO	0x009	GPIO Config
DCM	0x00A	DCM Mode
MANUFACTURER ID	0x01F	Manufacturer/Product Family ID
TOUCH CONFIGURATION	0x040	Touch mode - All touches reported, Strongest Touch, Dual Strongest Touches
	0x041 - 0x042	Touch Sensor Enable
	0x05F	Touch Parameter Memory Page Selection
TOUCH STATUS	0x045 - 0x046	Touch Status
	0x080 - 0x0CD (non-contiguous)	Cap Value (Read Only)
THRESHOLD SETTING (SENSITIVITY)	0x05F	Touch Parameter Memory Page Selection - Touch threshold conditions
	0x060 - 0x073 (non-contiguous)	Touch Threshold Value (Memory Page 1)
LED CONFIGURATION	0x020-0x02F	LEDx - Min Current, Max Current, Assignment; Latency; Effect Selection
	0x030-0x039	LEDx Effect Configuration
	0x03E	LED Manual Mode Configuration
	0x03F	LED Driver Enable Configuration
BUILT-IN SLIDER/SCROLL	0x04B	Slider/Scroll Position and Direction Reading
	0x074	Slider/Scroll Enable
CALIBRATION & SELC	0x04E	SELC Step Size, Ambient Calibration Enable, Calibration Status
	0x050	Calibration Timeout
	0x051	Ambient Calibration
	0x052	Recalibration Configuration
	0x053	Stuck Touch (Forced Recalibration)
	0x05F	Touch Parameter Page Selection
	0x060 - 0x073 (non-contiguous)	Calibration Parameters (Memory Pages 0, 2, 3, and 4)
	0x080 - 0x0CD (non-contiguous)	SELC Value (Read Only)
STRONGEST TOUCH CONFIGURATION	0x040	Strongest Touch Enable
	0x057	Strongest Touch Replacement Time
	0x075	Strongest Touch Hysteresis
RELATIVE STRONGEST TOUCH	0x076	Relative Strongest Touch Mode Enable
UNDEBOUNCE	0x076	# of consecutive scan cycles required before untouch is recognized
DEBOUNCE	0x057	Debounce time criteria
HYSERESIS	0x075	Touch Hysteresis Value + Strongest Touch Hysteresis
GUARD/SUPPRESS CHANNEL	0x07C-0x07D	Guard Channel Enable
	0x07E-0x07F	Guard Channel Mask
NOISE IMMUNITY	0x077	Set to 8001 (hex) for optimal noise filtering.

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

Reset																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x000	W	Cold Reset															
0x001	W	Software Reset															

Register Name	Position	Description	Function	Remark
COLD RESET		Hardware reset	Any value invokes HW reset (all configuration registers revert to default)	
SOFT RESET		Software reset	Any value invokes SW reset (keeps user settings, but recalibrates)	

POWER																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x002	R/W							Internal	Internal							LP	SHUTDOWN
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
LP	[1]	power saving mode	0 : Normal mode, 1 : Low Power Mode	
SHUTDOWN	[0]	shutdown mode	0 : Normal mode, 1 : Shutdown mode (only Serial I/F bus active)	

SLEEP WAIT																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x003	R/W	SLEEP WAIT															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
SLEEP WAIT	[15:0]	Full Power to Low Power wait time	Wait time = SLEEP WAIT x Scan Cycle Time (Scan Cycle Time = ~2ms x # of active sensors)	

INTB Config																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x008	R/W	INT_POL	Internal										INTB DRIVE			INTB MODE	
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
INT_POL	[15]	interrupt polarity	0 : active Low, 1: active High	
INTB_DRIVE	[4:3]	interrupt drive	0x0 : CMOS output 0x1 : OPEN-DRAIN output (pull up resistor required)	
INTB_MODE	[1:0]	interrupt signaling type	00: Fixed Duration Mode (INTB pin drives for 2us Fixed Duration) 01: Internal mode 1x: Read Reset Mode (INTB pin drives until Register 0x045 is read)	

GPIO Config																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x009	R/W												GPIO Input Config		GPIO/O		
Default Values	0002h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0

Register Name	Position	Description	Function	Remark
GPIO Input Config	[4:2]	GPIO input configuration	0x0 : not used 0x1 : negative level-sensitive 0x2 : positive level-sensitive 0x3 : not used 0x4 : not used 0x5 : negative edge-triggered 0x6 : positive edge-triggered 0x7 : both edge-triggered	
GPIO/O	[1:0]	GPIO state	0x0 : not used 0x1 : input 0x2 : active low output 0x3 : active high output	

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

		DCM Config															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x00A	R/W							DCM15	DCM14	Internal		DCM Enable (Bit 5 = DCM13, Bit 4 = DCM12... Bit 0 = DCM8)					
Default Values	0300h	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
DCM Enable	[9:8], [5:0]	DCM Function Enable	0 : disable, 1: enable	

		MID															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x01F	R	Internal								Manufacturer ID				Device ID			
Default Values	00F2h	0	0	0	0	0	0	0	0	1	1	1	1	0	0	1	0

Register Name	Position	Description	Function	Remark
Manufacturer ID	[7:4]	IDT PureTouch	IDT PureTouch = 1111	
Device Family ID	[3:0]	LDS61xx Family	LDS61xx Family = 0010	

		LED LED0															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x020	R/W	LED0 Max Current				LED0 Min Current				LED0 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED1															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x021	R/W	LED1 Max Current				LED1 Min Current				LED1 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED2															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x022	R/W	LED2 Max Current				LED2 Min Current				LED2 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED3															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x023	R/W	LED3 Max Current				LED3 Min Current				LED3 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED4															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x024	R/W	LED4 Max Current				LED4 Min Current				LED4 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED5															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x025	R/W	LED5 Max Current				LED5 Min Current				LED5 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED6															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x028	R/W	LED6 Max Current				LED6 Min Current				LED6 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

		LED LED7															
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x029	R/W	LED7 Max Current				LED7 Min Current				LED7 Assignment							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
LED Max Current	[15:11]	LED Maximum Current Drive	Driving Current = Register Value * 0.25 [mA]	
LED Min Current	[10:6]	LED Minimum Current Drive	Driving Current = Register Value * 0.25 [mA]	
LED Assignment	[4:0]	Touch Sensor Association	Touch Sensor Number - <b>SEE LOOKUP TABLE</b>	

#### LDS6128 Touch Sensor Assignment Lookup Table

Touch Sensor#	Bit [4:0] Assignment	Touch Sensor#	Bit [4:0] Assignment
C0	00000	C8/LED0	01010
C1	00001	C9/LED1	01011
C2	00010	C10/LED2	01100
C3	00011	C11/LED3	01101
C4	00100	C12/LED4	01110
C5	00101	C13/LED5	01111
C6	01000	C14/LED6	10000
C7	01001	C15/LED7	10001

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

LED Driver Latency Config																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x02E	R/W																
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
LATENCY_TIME	[7:0]	Latency time in 5ms increments	LED Driver Delay time = Value * 5 [ms]	

LED Effect Waveform Config																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x02F	R/W	EN_DOFF	EN_DON	Internal													
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
EN_DOFF	[15]	Dimming off enable	0 : disable, 1: enable	
EN_DON	[14]	Dimming on enable	0 : disable, 1: enable	
ACTIVE_TIME	[7:0]	LED Active/Period 2 Timer	Time = ACTIVE_TIME * 5ms	

LED0 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x030	R/W	LED0 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED1 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x031	R/W	LED1 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED2 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x032	R/W	LED2 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED3 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x033	R/W	LED3 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED4 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x034	R/W	LED4 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED5 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x035	R/W	LED5 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED6 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x038	R/W	LED6 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LED7 Effect Configuration (Period 1/3)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x039	R/W	LED7 Effect															
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
LEDx Effect	[15:14]	LED driver operation mode	0 : Linear (Dimming) mode 1 : Pulsate mode 2: Flash Mode 3 : Reserved	
LEDx Period 1	[11:6]	Period 1 Timer (see LED effect diagram for Period 1 significance)	Timer Value = value * 5ms * # of steps ** # of steps = (max current - min current) / 0.25	
LEDx Period 3	[5:0]	Period 3 Timer (see LED effect diagram for Period 1 significance)	Timer Value = value * 5ms * # of steps ** # of steps = (max current - min current) / 0.25	

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

LED Manual Mode Config																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x03E	R/W	EN_MAN	Gang					LED7, LED6		Internal		LED Driver Manual Control Bits (LED5-LED0)					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
EN_MAN	[15]	LED manual mode enable	0 : disable, 1: enable manual control, MAN_CTRL controls each LED channel	
GANG	[14]	LED gang mode	0 : normal mode, 1: Single LED event results in all LED turning on	
MAN_CTRL	[9:8], [5:0]	Manual LED on/off control for each LED channel	0 : manual LED off, 1 : manual LED on	

LED Driver Enable Configuration																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x03F	R/W							LED7, LED6		Internal		LED Driver Enable (LED5-LED0)					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
LED_ENABLE	[9:8], [5:0]	LED driver enable	0 : Disable 1 : Enable (LED enable bit dominates over Touch Sensor Enable in 0x042)	

TOUCH CONFIG																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x040	R/W	TCH_ENABLE	Internal					BUTTON_MODE				Internal		READY		Decimation	
Default Values	8030h	1	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0

Register Name	Position	Description	Function	Remark
TCH_ENABLE	[15]	Touch Function Enable	0 : Touch function in idle state, 1: Touch function in active state	
BUTTON_MODE	[9:8]	Touch Preference Mode (Strongest Touch Modes)	0x0 : Unrestricted mode, All touches reported 0x1 : Strongest Touch Mode 0x2 : Two Strongest Touches Mode 0x3 : reserved	
DEVICE_READY	[3]	Device Ready	0 : Self initialization state, 1: OK for host communication If DEVICE_READY=0, all bits except DEVICE_READY should be ignored.	Read Only Bit
Decimation	[2:0]	CDC decimation	0x0 : 1024 (default) 0x1 : 512 0x2 : 256 0x3 : 128 0x4 : 2048	Consult IDT representative if decimation is changed from 1024 default

Touch Sensor Enable (Channels 0-7)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x041	R/W							C7, C6		Internal		Touch Enable (C5-C0)					
Default Values	003Fh	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Touch Sensor Enable (Channels 8-15)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x042	R/W							C14, C14		Internal		Touch Enable (C13-C8)					
Default Values	0300h	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
TOUCH_ENBL	[9:8], [5:0]	Touch enable for each channel	0 : Channel disabled as touch sensor 1 : Channel enabled as touch sensor (may be overridden by LED Enable) DCM register 0x00A has priority over 0x041 in case of dual assignment	

INTERRUPT ENABLE (Channels 0-7)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x043	R/W							C7, C6		Internal		Touch Interrupt Enable (C5-C0)					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

INTERRUPT ENABLE (Channels 8-15)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x044	R/W							C15, C14		Internal		Touch Interrupt Enable (C13-C8)					
Default Values	0300h	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
TOUCH_INT_EN	[9:8], [5:0]	Touch interrupt enable for each channel	0 : disable 1 : enable	


# LDS6108/6128

## Configuration Register Map and Description




### LED Effect Diagrams

#### Dimming Effect

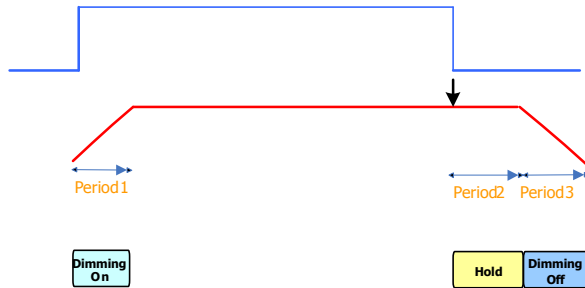


**Dimming Effect Timers:**  
**Period 1\*:** Dimming On Time  
**Period 2\*\*:** Active/Hold Time (After Touch is Removed)  
**Period 3\*:** Dimming Off Time  
 \*: Individual Timer per LED  
 \*\*: Universal Timer for All LEDs

#### Pulsate Effect:

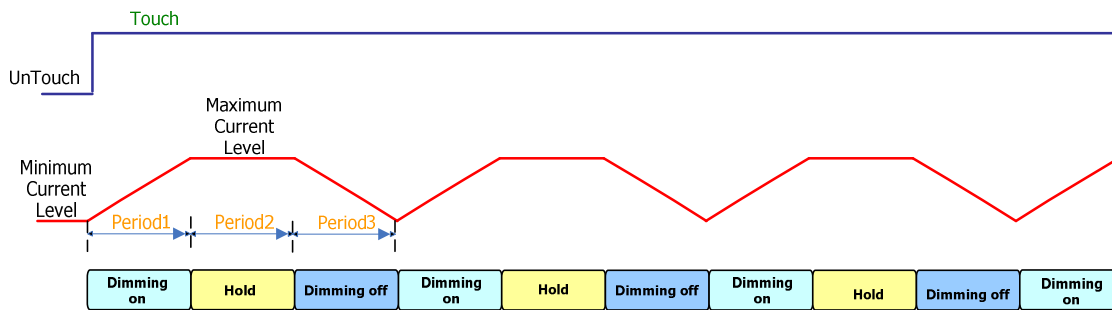

**Pulsate Effect Timers:**  
**Period 1\*:** Dimming On Time  
**Period 2\*\*:** Hold Time at Max Current  
**Period 3\*:** Dimming Off Time  
 \*: Individual Timer per LED  
 \*\*: Universal Timer for All LEDs

#### Flash Effect:

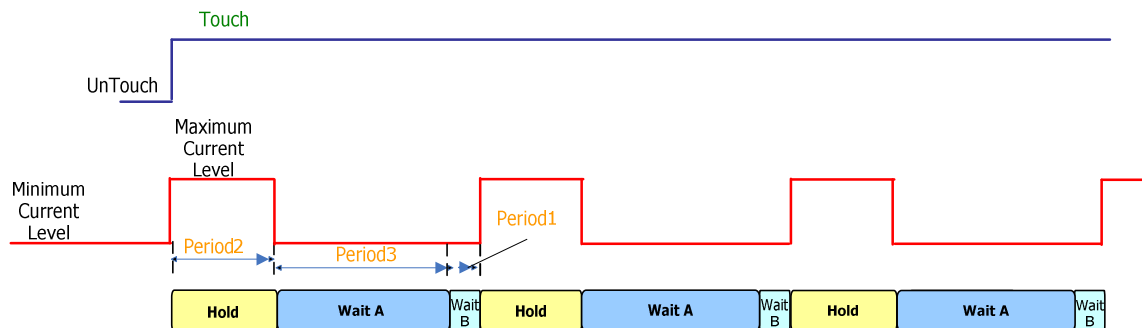

**Flash Effect Timers:**  
**Period 1\*:** Second Wait Time (Wait B)  
**Period 2\*\*:** Hold Time at Max Current  
**Period 3\*:** First Wait Time (Wait A)  
 \*: Individual Timer per LED  
 \*\*: Universal Timer for All LEDs



# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

TOUCH STATUS (Channels 0-7)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x045	R							Status C7, C6		Internal							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

TOUCH STATUS (Channels 8-15)																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x046	R	GPI_INT						Status C15, C14		Internal							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
GPI_INT	[15]	GPI interrupt status	0 : no GPI interrupt, 1 : GPI interrupt (Used if GPIO is configured as input via Register 0x009)	
TOUCH_INT_STS	[9:8], [5:0]	Touch interrupt status for each channel	Indicates which touch sensor channel was activated by a touch when INTB signal is triggered	

SCROLL STATUS																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x04B	R/W	Internal	Internal							SCROLL_INT	DIR_ENBL	SCROLL_DIR					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
SCROLL_INT	[7]	Scroll/Slider Touch Interrupt	0 : Not Touched 1 : Position Interrupt Status	Read Only
DIR_ENBL	[6]	Scroll/Slider Touch Direction Enable(Active) Status	0 : Not movement 1 : Direction Enable(Active)	
SCROLL_DIR	[5]	Scroll/Slider Touch Direction Status	0 : Low/Left/CCW Direction 1 : High/Right/CW Direction	Read Only
POSITION_ID	[4:0]	Scroll/Slider Touch Position ID	- Value : 0 (Not Used for Scroll/Slider Input Type) - Value : 1~16 (Scroll/Slider Touch Position ID)	Read Only

SELCT CONFIG and CALIBRATION STATUS																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x04E	R/W	Internal	ACTIVE	AMB_DIS	Internal												
Default Values	0002h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0

Register Name	Position	Description	Function	Remark
ACTIVE	[14]	touch calibration status	0 : in calibration state 1 : calibration finished	Read Only Bit
AMB_DIS	[13]	ambient calibration disable	0 : ambient calibration active 1 : disable ambient calibration	Optional disabling of ambient cal
SELCT_UNIT	[3:0]	SELCT change amount during calibration	0 : adaptive SELCT tracking algorithm used others : During tracking, SELCT changes its value by the amount of SELCT_UNIT	Refer to 6100 AN2 App Note

CALIBRATION TIMEOUT																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x050	R/W	Internal	Internal														
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
CALIB_TIMEOUT	[7:0]	calibration timeout limit	0x0 : infinite 0x1 : when calibration iteration reaches CALIB_TIMEOUT, tracking is done.	

AMBIENT CALIBRATION																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x051	R/W				CNT_DEC_LIMIT										CNT_INC_LIMIT		
Default Values	1F1Fh	0	0	0	1	1	1	1	1	0	0	0	1	1	1	1	1

Register Name	Position	Description	Function	Remark
CNT_DEC_LIMIT	[15:8]	Value determines how quickly ambient calibration is triggered (negative side)	0x0 : INVALID others : count limit	
CNT_INC_LIMIT	[7:0]	Value determines how quickly ambient calibration is triggered (positive side)	0x0 : INVALID others : count limit	

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

RECALIBRATION CONFIGURATION																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x052	R/W																
Default Values	0063h	0	0	0	0	0	0	0	0	0	1	1	0	0	0	1	1

Register Name	Position	Description	Function	Remark
RECAL_DELAY	[10:0]	Wait time prior to forced recalibration when cap value above ambient threshold but below touch threshold (i.e. not an actual touch)	wait time = (RECAL_DELAY+1) * single round time * 4 Max time = 16.4s (1 ch) to 262s (16ch)	Default is 0.8s x # of active ch with 1024 decimation

STUCK TOUCH																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x053	R/W																
Default Values	0063h	0	0	0	0	0	0	0	0	0	1	1	0	0	0	1	1

Register Name	Position	Description	Function	Remark
CNT_TOUCH_LIMIT	[10:0]	Wait time prior to forced recalibration when cap value is above threshold level (stuck touch scenario)	wait time = (CNT_TOUCH_LIMIT+1) * single round period * 4 Max time = 16.4s (1 ch) to 262s (16ch)	Default is 0.8s x # of active ch with 1024 decimation

IDLE CONFIG																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x055	R/W																
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
MAX_DEACT_IDLE	[15:0]	staying IDLE time during inactive touch channel selected	Idle time = (MAX_DEACT_IDLE+1) * OSC period (2us) All channels treated as inactive during Sleep Period	Init file must set this to 24(dec) to enable 1ms increments of SLEEP_TIME with 1024 decimation

SLEEP CONFIG																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x056	R/W																
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
SLEEP_TIME	[15:0]	# of ms of desired sleep time	Determines duty cycle between active (full power) and sleep (reduced power) that determines average current consumption in low power mode	Init file must set 0x055 to 24(dec) to enable 1ms increments of SLEEP_TIME with 1024 decimation

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

DEBOUNCE AND STRONGEST TOUCH CONFIGURATION																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x057	R/W	DEBOUNCE				REPLACEMENT_TIME											
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
DEBOUNCE	[15:12]	# of consecutive scan cycles required before first touch is recognized	Debounce time criteria required to register first touch Time = DEBOUNCE x scan cycle time, where scan cycle time is equal to 2ms x # of active sensors	
REPLACEMENT_TIME	[11:0]	# of consecutive scan cycles required for new touch with strongest signal to replace current strongest touch	Strongest Touch Mode (Absolute or Relative) option to minimize frequent toggling between two touches of comparable strength Time = REPLACEMENT_TIME x scan cycle time, where scan cycle time is equal to 2ms x # of active sensors	Set to "0" for Two Strongest Touch

TOUCH PARAMETER PAGE SELECTION																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x05F	R/W	0:initial SELC, 1: touch threshold, 2:ambient threshold, 3:minus noise level, 4:plus noise level												PAGE			
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
PAGE	[2:0]	indirect memory access address	0 : Initial SELC (May be used to accelerate calibration times) Please refer to 6100 AN2 app note for details 1 : Touch Threshold (# capacitive units above baseline to activate touch) 2 : Ambient Threshold (Defines region, along with touch threshold, within which recalibration is delayed by RECAL_DELAY 0x052) 3 : Minus Noise Level (Defines - region within which baseline may vary without triggering an ambient recalibration) 4 : Plus Noise Level (Defines + region within which baseline may vary without triggering an ambient recalibration)	Refer to 6100 AN2 App Note

TOUCH PARAMETERS																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x060	W																
0x061	W																
0x062	W																
0x063	W																
0x064	W																
0x065	W																
0x068	W																
0x069	W																
0x06A	W																
0x06B	W																
0x06C	W																
0x06D	W																
0x06E	W																
0x06F	W																
0x072	W																
0x073	W																
Default Values (PAGE=0)	00B8h	0	0	0	0	0	0	0	0	1	0	1	1	1	0	0	0
Default Values (PAGE=1)	0028h	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0
Default Values (PAGE=2)	000Ah	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0
Default Values (PAGE=3)	0003h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1
Default Values (PAGE=4)	0003h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1

Register Name	Position	Description	Function	Remark
Touch PARAM	[10:0]	multiplexed touch parameter	0 : Initial SELC (May be used to accelerate calibration times) Please refer to 6100 AN2 app note for details 1 : Touch Threshold (# capacitive units above baseline to activate touch) 2 : Ambient Threshold (Defines region, along with touch threshold, within which recalibration is delayed by RECAL_DELAY 0x052) 3 : Minus Noise Level (Defines - region within which baseline may vary without triggering an ambient recalibration) 4 : Plus Noise Level (Defines + region within which baseline may vary without triggering an ambient recalibration)	Refer to 6100 AN2 App Note

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

SCROLL/SLIDER CHANNEL ENABLE																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x074	R/W	INT_SEL	Internal				SCE C7, C6		Internal		Scroll Channel Enable (C5-C0)						
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
INT_SEL	[15]	SCROLL/SLIDER Touch channel Interrupt Enable	0 : disable, 1: enable	
SCROLL_CH[7]	[9]	channel 7 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[6]	[8]	channel 6 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[5]	[5]	channel 5 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[4]	[4]	channel 4 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[3]	[3]	channel 3 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[2]	[2]	channel 2 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[1]	[1]	channel 1 Scroll/Slider Touch Enable	0 : disable, 1: enable	
SCROLL_CH[0]	[0]	channel 0 Scroll/Slider Touch Enable	0 : disable, 1: enable	

TOUCH HYSTERESIS																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x075	R/W	STR_HYSTERESIS[15:8]								HYSTERESIS[7:0]							
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
STR_HYSTERESIS	[15:8]	Strongest Touch Hysteresis value	Extra/additional capacitance value required for new strongest touch to replace current strongest touch. For example, if STR_HYSTERESIS is set to a value of 15 (decimal), the capacitance value required to displace the current strongest touch must be at least 15 capacitance units higher than the current value of the current strongest touch.	
HYSTERESIS	[7:0]	Touch Hysteresis Value (# of cap value units permitted to decrease below Touch Threshold while still maintaining touch status)	Value range : 0~255 Example: Assuming baseline value of 510 and Touch Threshold setting of 40, capacitive value above 550 triggers an initial touch event. If HYSTERESIS value is set to "15", then the sensor capacitive value may go as low as 535 (550-35) and still be considered as original touch.	

RELATIVE STRONGEST AND UNDEBOUNCE																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x076	R/W	RELATIVE_EN	INTERNAL											UN_DEBOUNCE [3:0]			
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
RELATIVE_EN	[15]	Relative Strongest Touch Mode	0 : disable, 1: enable	
UN_DEBOUNCE	[3:0]	# of consecutive scan cycles required before UNtouch is recognized	Debounce time required for UNtouch event to be recognized Time = DEBOUNCE x scan cycle time, where scan cycle time is equal to 2ms x # of active sensors	

NOISE IMMUNITY ENABLE																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x077	R/W	NI_ENBL	INTERNAL			NI_OPTION											
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
Noise Immunity EN	[15]	Enable Noise Immunity	0 : disable, 1: enable. <b>Recommended Value = 1</b>	Set to "1"
Noise Immunity Option	[11:0]	Noise Immunity Option	Setting Options. <b>Recommended Value = 1</b>	Set to "1"

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

Guard Channel Enable Register [C0-C13]																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x07C	R/W	GUARD_CH[13:6]						Internal				GUARD_CH[5:0]					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
GUARD_CH[13]	[15]	channel 13 guard channel enable	0 : disable, 1: enable	
GUARD_CH[12]	[14]	channel 12 guard channel enable	0 : disable, 1: enable	
GUARD_CH[11]	[13]	channel 11 guard channel enable	0 : disable, 1: enable	
GUARD_CH[10]	[12]	channel 10 guard channel enable	0 : disable, 1: enable	
GUARD_CH[9]	[11]	channel 9 guard channel enable	0 : disable, 1: enable	
GUARD_CH[8]	[10]	channel 8 guard channel enable	0 : disable, 1: enable	
GUARD_CH[7]	[9]	channel 7 guard channel enable	0 : disable, 1: enable	
GUARD_CH[6]	[8]	channel 6 guard channel enable	0 : disable, 1: enable	
GUARD_CH[5]	[5]	channel 5 guard channel enable	0 : disable, 1: enable	
GUARD_CH[4]	[4]	channel 4 guard channel enable	0 : disable, 1: enable	
GUARD_CH[3]	[3]	channel 3 guard channel enable	0 : disable, 1: enable	
GUARD_CH[2]	[2]	channel 2 guard channel enable	0 : disable, 1: enable	
GUARD_CH[1]	[1]	channel 1 guard channel enable	0 : disable, 1: enable	
GUARD_CH[0]	[0]	channel 0 guard channel enable	0 : disable, 1: enable	

Guard Channel Enable Register [C13-C14]																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x07D	R/W												GUARD_CH[15:14]		Internal		
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
GUARD_CH[15]	[3]	channel 15 guard channel enable	0 : disable, 1: enable	
GUARD_CH[14]	[2]	channel 14 guard channel enable	0 : disable, 1: enable	

Guard Channel Mask Register [C0-C13]																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x07E	R/W	GUARD_MASK[13:6]						Internal				GUARD_MASK[5:0]					
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
GUARD_MASK[13]	[15]	channel 13 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[12]	[14]	channel 12 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[11]	[13]	channel 11 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[10]	[12]	channel 10 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[9]	[11]	channel 9 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[8]	[10]	channel 8 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[7]	[9]	channel 7 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[6]	[8]	channel 6 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[5]	[5]	channel 5 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[4]	[4]	channel 4 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[3]	[3]	channel 3 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[2]	[2]	channel 2 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[1]	[1]	channel 1 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[0]	[0]	channel 0 guard mask enable	0 : disable, 1: enable	

Guard Channel Mask Register [C14-C15]																	
Register Address	Direction	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x07F	R/W	INTERNAL	INTERNAL	INTERNAL										GUARD_MSK[15:14]		Internal	
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Register Name	Position	Description	Function	Remark
GUARD_MASK[15]	[3]	channel 15 guard mask enable	0 : disable, 1: enable	
GUARD_MASK[14]	[2]	channel 14 guard mask enable	0 : disable, 1: enable	

# LDS6108/6128

## Configuration Register Map and Description



### Detailed Register Information and Default Values

Register Address	Direction	Cap Value and SEL C Value																
		Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0x080	R																	Touch0 Cap
0x081	R	Touch0 SELP																Touch0 SELC
0x084	R																	Touch1 Cap
0x085	R	Touch1 SELP																Touch1 SELC
0x088	R																	Touch2 Cap
0x089	R	Touch2 SELP																Touch2 SELC
0x08C	R																	Touch3 Cap
0x08D	R	Touch3 SELP																Touch3 SELC
0x090	R																	Touch4 Cap
0x091	R	Touch4 SELP																Touch4 SELC
0x094	R																	Touch5 Cap
0x095	R	Touch5 SELP																Touch5 SELC
0x0A0	R																	Touch6 Cap
0x0A1	R	Touch6 SELP																Touch6 SELC
0x0A4	R																	Touch7 Cap
0x0A5	R	Touch7 SELP																Touch7 SELC
0x0A8	R																	Touch8 Cap
0x0A9	R	Touch8 SELP																Touch8 SELC
0x0AC	R																	Touch9 Cap
0x0AD	R	Touch9 SELP																Touch9 SELC
0x0B0	R																	Touch10 Cap
0x0B1	R	Touch10 SELP																Touch10 SELC
0x0B4	R																	Touch11 Cap
0x0B5	R	Touch11 SELP																Touch11 SELC
0x0B8	R																	Touch12 Cap
0x0B9	R	Touch12 SELP																Touch12 SELC
0x0BC	R																	Touch13 Cap
0x0BD	R	Touch13 SELP																Touch13 SELC
0x0C8	R																	Touch14 Cap
0x0C9	R	Touch14 SELP																Touch14 SELC
0x0CC	R																	Touch15 Cap
0x0CD	R	Touch15 SELP																Touch15 SELC
Default Values	0000h	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

# LDS6108/6128

## Configuration Register Map and Description

---



---

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

---



6024 Silver Creek Valley Road  
San Jose, California 95138  
<http://www.idt.com>

Document No: 6108/6128RM  
Revision: 0.2  
Date: 04/01/10