

Description


The P8911 is a power management IC (PMIC) designed for notebook, desktop, and embedded computing platforms. IDT's P8911 enables next-generation client platforms to take full advantage of DDR5 memory to realize greater performance, density, and reliability while reducing overall system power.

The P8911 has been optimized from the previously announced P8900 server PMIC to meet the specific needs of the client and embedded application spaces. With over 50% reduction in package footprint versus the P8900, the P8911 also features power delivery characteristics tailored toward smaller form factor memory modules that reside in systems that may operate on battery power for extended periods.

Typical Applications

Small outline and unbuffered DDR5-based dual in-line memory modules (DIMM)

Block Diagram

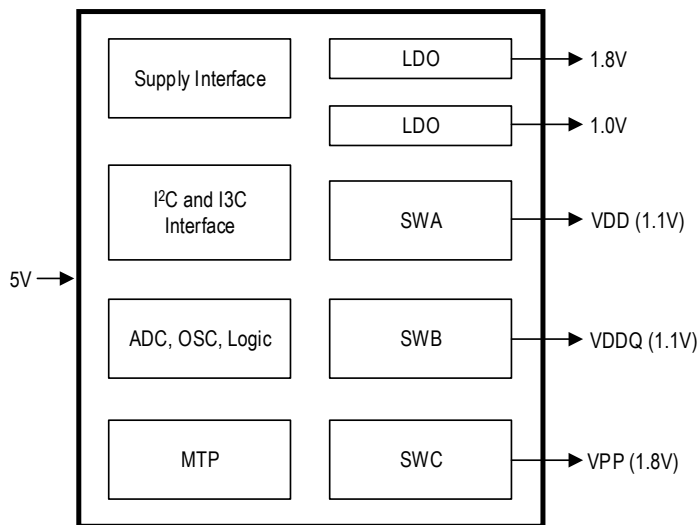

Features

- VIN_Bulk input supply range: 4.25V to 5.5V
- Three step-down switching regulators: SWA, SWB, SWC
- Programmable dual phase and single phase regulator for SWA and SWB
- Multi-Time Programmable Non-Volatile Memory
- Error injection capability
- Persistent error log registers
- Two LDO regulators: VOUT_1.8V, VOUT_1.0V
- Secure Mode and Programmable mode of operation
- Independently programmable output voltages, power-up, and power-down sequence for switch regulators
- Output power good status reporting mechanism
- VIN_Bulk input supply protection feature: Input over voltage
- Flexible Open Drain IO (I²C) and Push Pull (I³C Basic) IO Support
- Flexible mechanism to enable switch regulators (w/VR_EN pin or VR Enable command on I²C or I³C Basic interface)
- Idle Power State (P1 State)
- 28-QFN, 3 × 4 mm package



Corporate Headquarters
6024 Silver Creek Valley Road
San Jose, CA 95138 USA
www.IDT.com

Sales
1-800-345-7015 or 408-284-8200
Fax: 408-284-2775
www.IDT.com/go/sales

Tech Support
www.IDT.com/go/support

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit www.idt.com/go/glossary. Integrated Device Technology, Inc. All rights reserved.